

A Time Leap Challenge for SAT-Solving*

Johannes K. Fichte¹, Markus Hecher², and Stefan Szeider³

¹TU Dresden, Germany, johannes.fichte@tu-dresden.de

²TU Wien, Austria; U. Potsdam, Germany, hecher@dbai.tuwien.ac.at

³TU Wien, Austria, sz@ac.tuwien.ac.at

Abstract

We compare the impact of hardware advancement and algorithm advancement for SAT-solving over the last two decades. In particular, we compare 20-year-old SAT-solvers on new computer hardware with modern SAT-solvers on 20-year-old hardware. Our findings show that the progress on the algorithmic side has at least as much impact as the progress on the hardware side.

Keywords: SAT-Solving, Benchmarking, Old Hardware, Hardware Advancement, Algorithm Advancement.

1 Introduction

The last decades have brought enormous technological progress and innovation. Two main factors that are undoubtedly key to this development are (i) *hardware advancement* and (ii) *algorithm advancement*. Moore’s Law, the prediction made by Gordon Moore in 1965 [55], that the number of components per integrated circuit doubles every year, has shown to be astonishingly accurate for several decades. Given such an exponential improvement on the hardware side, one is tempted to overlook the progress made on the algorithmic side.

This paper aims to compare the impact of hardware advancement and algorithm advancement based on a genuine problem, the propositional satisfiability problem (SAT). This problem is well-suited for such a comparison since it is one of the first problems for which progress in solving has been measured regularly through competitions [37]. Also, a standardized instance format has been established very early. By focusing on this problem, the comparison allows us to fathom the SAT and CP community’s contribution to the overall progress.

Of course, the advancements in hardware and algorithms cannot be separated entirely. Targeted algorithm engineering can make use of new hardware features [10, 13, 22, 39] and hardware development can be guided by the specific demands of modern algorithms. We are well aware that this can quickly end up in comparing apples and oranges. Nevertheless, we think that by carefully setting up the experiment and choosing hardware and algorithms, it still allows us to draw some conclusions on the impact of the individual components.

We base the general setup of the comparison on a *Time Leap Challenge*, where virtual teams compete. Team SW uses new solvers on old hardware; Team HW uses old solvers on new hardware. The time between “old” and “new” spans about two decades. Which team can solve more instances? Depending on the outcome, one can compare the impact of hardware advancement and algorithm advancement. The idea for this time leap challenge for SAT-solvers

*The work has been supported by the Austrian Science Fund (FWF), Grants Y698, 32441, and 32830, and the Vienna Science and Technology Fund, Grant WWTF ICT19-065. Markus Hecher is also affiliated with the University of Potsdam, Germany.

was inspired by a thought experiment on algorithms in mixed-integer linear programming (MILP), suggested by Sebastian Stiller [70].

In the early 1990s, the dominant complete method for SAT-solving was the *DPLL Algorithm* (Davis-Putnam-Logemann-Loveland [16, 15]), which combines backtracking search with Boolean constraint propagation [74]. However, in the late 1990s, the *CDCL Solvers* (Conflict-Driven Clause Learning) took over. They extended the basic DPLL framework with new methods, including clause learning [65], lazy data structures like watched literals [56], backjumping [65, 56], and dynamic branching heuristics [56]; the combination of these methods resulted in a significant performance boost, often referred to as the “CDCL Revolution”. Although the CDCL paradigm is still predominating today’s SAT-solving, there have been several significant improvements made over the last two decades, including efficient preprocessing [17] and inprocessing [39], aggressive clause deletion [2], fast restarts [50], lightweight component caching [60], implication queue sorting [47], and new branching heuristics [49].

1.1 Experimental Setting

For our Time Leap Challenge, Team HW (old solvers on new hardware) is composed of the solvers **Grasp** (1996), **zChaff** (2001), and **siege** (2003) running on a computer from 2019 with an Intel Xeon Silver 4112 CPU at 2.60GHz base frequency and 128GB RAM. Team SW (new solvers on old hardware) is composed of the solvers **MapleSat19** (2019), **CaDiCal** (2019), and **Glucose** (2016) running on a computer from 1999 with a Pentium III processor at 467MHz frequency and 1.5GB RAM. An essential question for setting up the experiment was the choice of a suitable set of benchmark instances. On the one hand, the instances should not be too challenging so that they are not entirely out of reach for old solvers or old hardware; on the other hand, the instances should still be challenging enough to provide interesting results. We settled on the benchmark set *set-asp-gauss* [34] that provides a reasonably good compromise, as it contains a large variety of instances, tailors adapted instance hardness, is free of duplicates, reproducible, and publicly available. We used a timeout of 900 seconds, which is the default for SAT competitions. Right in the beginning, we state a clear disclaimer. While a theoretical challenge is easy to design, a practical comparison can rarely be comprehensive and complete. About 20 years of evolution increases the practical search space by orders. There are many possibilities to combine hardware, software, benchmarks, and solvers. Particularly, there might be solvers that are still available, but we missed during our research. Still, we provide a clear guideline on how we selected the teams and provide extensive details beyond. Our results are reproducible in the setting, and the conclusions provide a general idea. However, the ideas might not generalize to conclusions over other benchmark sets or solvers we might have missed. This is, however, a usual situation in many experiments with combinatorial solving as there is no good theoretical understanding of the practical effects [59]. Still, we aimed to put the concept of a thought time leap challenge from literature in popular science into a practical scientific context.

1.2 Results

Table 1 gives a summary of our results (we provide more details in Section 3). We see that both teams perform in a similar range with a slight advantage for Team SW.

1.3 Related Work

Knuth [44] provides an overview of various aspects of SAT-solving, including commented implementations of algorithms from several epochs of SAT-solving. His implementations assemble a DPLL solver (**SAT10**), a DPLL look-ahead solver (**SAT11**), and a CDCL solver (**SAT13**), as well as a preprocessor (**SAT12**). Since all these solvers are implemented uniformly, without special

	Grasp (1996)	zChaff (2001)	siege_v3 (2003)	Glucose (2016)	CaDiCal (2019)	Maple (2019)
old HW (1999)	73	48	37	Team SW 106 98 77		
new HW (2019)	Team HW 76 71 93			188	190	195

Table 1: Summary of experimental results

implementation or hardware tricks, they provide an excellent comparison of the algorithmic advancement of solver techniques. We therefore included, for comparison, the results of Knuth’s solvers on the same benchmark set and hardware platform as the time leap challenge. Mitchell [54] provides an overview of techniques, implementations, and algorithmic advances of the year 2005 and looking back for 15 years. He already mentioned that the success of SAT-solving is due to three factors: improved algorithms, improved implementation techniques, and increased machine capacity. However, Mitchell’s work does not provide evaluations on any actual practical effects at the time. Kohlhase [46] recently published work on collecting and preserving the comparability of old theorem provers to preserve cultural artifacts and history in Artificial Intelligence.¹ For an overview on the technique of CDCL-based solvers we refer the reader to introductory literature such as a chapter in the Handbook of Knowledge Representation [29], chapters on the history of modern SAT-solving [24], and CDCL-solvers [53] in the Handbook of Satisfiability [9]. Katebi, Sakallah, and Marques-Silva [43, 64] considered various techniques of modern SAT-solvers under an empirical viewpoint. They designed experiments to evaluate factors and the aggregation of different SAT-enhancements that contribute to today’s practical success of modern solvers. Works on targeted algorithm engineering for SAT-solvers are extensive. Just to name a few examples, there is work on exploiting features such as optimizing memory footprints for the architecture [10], on implementing cache-aware [13], on using huge pages [22], on how to benefit from parallel solving [35] or employing inprocessing. Inprocessing particularly takes advantage of modern hardware as one can execute much more instructions on a modern CPU than accessing bytes on memory [31, 51]. Very recently, Audemard, Paulev, and Simon [1] published a heritage system for SAT solvers. It allows for compiling, archiving, and running almost all released SAT solvers and is based on Docker, GitHub, and Zenodo. While they aim for archivability, our work provides an actual experiment incorporating soft- and hardware advances. We hope that their system allows for long term preservation and, if there is no major change in the computer architecture, that one can repeat our time leap challenge in another decade.

2 The Arena: Designing the Time Leap Challenge

To run a proper challenge, we design an arena by selecting from standard benchmark sets and several contestants out of a vast space of possibilities. We aim for the reasonable oldest hardware on which we can still run modern benchmark sets and solvers. In turn, this requires to set up a modern operating system on old hardware. To make it a time leap challenge, we are interested in solvers and hardware from similar generations, so a preferably small time frame from which both originate. The physical effort restricts us to consider only two time frames in the following. We take modern hardware and solvers from 2019 and old hardware from around 2000 and solvers from 2001/2002. Following academic ideas by Stallman [69], we focus on benchmark sets and

¹The Theorem Prover Museum is available online at <https://theoremprover-museum.github.io/>

benchmark	solver	#	TO	ERR	$t[h]$	avg[s]
DIMACS2	Glucose	225	15	1	0.34	5.46
SATLIB	Glucose	43892	15	6399	4.45	0.36
set-asp-gauss	Glucose	189	11	0	4.50	85.71

Table 2: Runtime of a modern solver and modern hardware on selected benchmark sets. # refers to the number of solved instances, TO refers to the number of instances on which the solver timed out, ERR refers to the number of instances on which the solver found an input error, $t[h]$ refers to the total running time on the solved instances in hours, avg[s] refers to the average running time of an instance.

solvers that are publicly available. Throughout the experimental work, we follow standard guidelines for benchmarking [73]. In the course of this section, we elaborate on various technical and organisational obstacles. Setting up a time leap challenge is also somewhat of an archaeological challenge. In theory, a variety of competitions have been organized in the past. The competition results give a broad picture of benchmark instances and solvers. Old hardware and operating systems should still be widely available. In practice, neither open source, nor version control systems, nor public platforms to host software projects such as SourceForge², bitbucket, github, or gitlab, were popular in the community around the millennium. Publicly funded data libraries such as Zenodo [58] were also established much later. While the culture of storing text in libraries dates back to Alexandria and the first librarian Zenodotus in 280 BC, searching for datasets and source codes from 20 years ago feels like digging through a burnt library. Enthusiasts maintained datasets and source codes from early competitions. Sometimes source codes were kept as a secret [28]. Some links redirect to grabbed domains, or people moved and with them, the webpages. Sometimes binaries show up from private collections or the Internet Archive [42]. However, it turned out that they do not run, as libraries on which they depend do not run on modern Linux or Unix distributions. Below we report and explain details of the selection process.

Instance Format. Johnson and Trick suggested a uniform input format description in 1993, which is still used as the standard for SAT input instances [40]. The standardized input format and backward compatibility substantially simplified our selection process.

2.1 Selecting a Suitable Benchmark Set

Our focus on selecting a benchmark set is to consider a larger benchmark set, say of a cardinality ranging from 100 to 300. We are interested in a safe and stable choice of instances since benchmarks run a wide variety of experiments with preferably more than 10 solvers resulting in months of running time. Hence, we push to a reasonable state-of-the-art benchmark setting. We prefer instances that (i) are publicly available, (ii) contain a good selection of domains, including an industrial background, random, and combinatorial instances, and (iii) highlight differences for modern solvers. We summarize runtime and number of solved instances during our instance selection process in Table 2. For an initial selection, we ran instances only with the solver **Glucose** [4], which showed robust performance on many earlier experimental works that we carried out.

Available Instances. The first available benchmark instances *DIMACS-2* date back to 1992 and the 2nd DIMACS Challenge 1992–1993 on NP-hard problems, which also considered SAT as a problem [72]. The 241 instances are still well maintained and downloadable³. Note that the 1st

²<https://en.wikipedia.org/wiki/SourceForge>

³See: <http://archive.dimacs.rutgers.edu/pub/challenge/sat/benchmarks/>

SAT competition already took part in 1992 [11]. However, the instances are not publicly available. Over time researchers collected benchmarks such as *SATLIB* [32], which count more than 50,000 instances in total. The instances are still available on an old webpage by the collector.⁴ A subset of these instances was also used for the SAT Competition 2002. However, those instances are not available from the SAT Competition website due to an abandoned domain. Instances from one of the annual SAT competitions from 2002 to 2019⁵ follow stricter rules and detailed reports are available [38]. There are plenty of tracks, thousands of instances, and many of the more modern instances are enormous in size. A popular benchmark set with various instances from SAT competitions until 2013 and various fields is the benchmark set *set-asp-gauss* [34]. The set is a composition of representative benchmarks from a variety of sources. It has been widely used as a robust selection for tuning solvers in the past and was obtained by classifying the practical hardness of the instances from the SAT Competition 2009 and SAT Challenge 2012 and then selecting instances by sampling with the Gaussian probability distribution [34].

Initial Evaluations. In order to gather initial insights, we ran all available solvers on our cluster. The hardware for the benchmark selection process consisted of a cluster of RHEL 7.7 Linux machines equipped with two Intel Xeon E5-2680v3 CPUs of 12 physical cores each running at 2.50GHz, which we enforced by performance governors. The machines are equipped with 64GB main memory of which 60.5GB are freely available to programs. We compare wall clock time and number of timeouts. However, we avoid IO access on the CPU solvers whenever possible, i.e., we load instances into the RAM before we start solving. We run four solvers on one node at most, set a timeout of 900 seconds, and limit available RAM to 8GB per instance and solver. We summarize our initial evaluation of the early benchmark sets in Table 2. The DIMACS-2 instances turned out to be very easy for modern solvers. For example, the solver Glucose solved almost all instances within less than one second, only five large instances (par32-X.cnf) of a parity learning problem remained unsolved within 900 seconds. The SATLIB instances are more challenging but still fairly easy for modern solvers. The SAT Competition 2002–2019 instances provide a broad selection. Since the results are still publicly available, we refrained from rerunning these sets. The runtime results on the benchmark set *set-asp-gauss* revealed that modern solvers can solve many instances. However, the instances are still challenging as the overall runtimes are reasonably long. Old solvers are still able to solve plenty of instances on modern hardware. The benchmark set consists of 200 instances in total.

Decision. After running the instances, we picked one existing benchmark set. Since the set *DIMACS-2* contains almost only easy instances, we rejected the set right away. While the *SATLIB* instances contain mainly easy instances, they are not very challenging for modern solvers. Further, the contained benchmarks have a strong bias towards handcrafted and random instances. The SAT 2002–2019 instances contain very interesting sets. However, some of the more modern instances are very large, and we figured that it is impossible to transfer and run the instances on old hardware. After reviewing the initial results and sampling memory requirements from earlier SAT competitions, we decided to use the benchmark set *set-asp-gauss* [34], which provides a reasonably good compromise. It contains a large variety of instances, tailors adapted instance hardness, is free of duplicates, reproducible, and publicly available.

2.2 Selecting Solvers

In the following section, we describe the selection process of SAT-solvers for our challenge. In order to foster reproducibility and favor open-source, we focus on publicly available solvers (binary or source code). Note that modern SAT-solving also includes various parallel algorithms.

⁴See: <https://www.cs.ubc.ca/~hoos/SATLIB/benchm.html>

⁵The webpage <http://www.satcompetition.org/> gives a broad overview on the results and details of the competitions since 2002.

Due to the unavailability of wide parallel computation on old hardware, we restrict ourselves to sequential solvers. Further, we consider only solvers that are, vaguely speaking, descendants of the DPLL [16, 15] algorithm, i.e., CDCL. These solvers are often referred to as solvers implementing complete and systematic search. However, restarts and deletion might affect completeness under certain conditions in practice [53]. To our knowledge, CDCL-based solvers with various additional techniques on top, which even extend the underlying proof system, are still the most prevailing paradigm for SAT-solvers. However, today, some solvers use strong proof techniques such as the division rule in cutting planes [20, 27] or Gaussian Elimination [66, 67].

Researching for Solvers. The 1st SAT Competition [11] and 2nd DIMACS Challenge [72] took place around 1992. However, no online resources on detailed solvers or source codes are available. The earliest public collection of solvers which is still available online⁶, is the SATLIB Solver Collection [33]. The collection contains implementations on DPLL-based implementations as well as stochastic local search solvers. DPLL-based Implementations in the collection are **Grasp** [65], **NTAB** [14], **POSIT** [25], various versions of **REL_SAT** [6, 41], which are also available on github⁷, two versions of **SAT0** [75], and four versions of **Satz** [48]. Further, we asked colleagues for the source code of old solvers and received an even older version of **Grasp** from 1996 [52]. The era of CDCL solvers started in 2001 [56]. There, successful solvers such as **BerkMin** [28], **siege** [63], and **zChaff** [26] materialized. **Siege** [63] is publicly available with binaries in three versions from 2003 to 2004. We contacted colleagues on the source code of **siege**, but the author retired and the sources seem to be lost. For **zChaff** [26] even the source code is publicly available in four versions from 2001 to 2007. Binaries of **BerkMin** showed up in a backup of experiments on SAT-solvers from earlier works. We contacted the authors on source codes but received no answer. A famous solver in the SAT-solvers line is **MiniSat**, which is available online⁸ in various versions [19, 18, 68]. The development of **MiniSat** started around 2003 [18] intending to create a compact, readable, and efficient solver for the community. The earliest version online is from 2005 and the most known and very popular version 2.2 from 2008. Another popular SAT-solver is **Glucose** [3], which was developed to aggressively remove clauses that are not helpful during clause learning of the CDCL procedure. This results in an incomplete algorithm as keeping learnt clauses is essential for completeness. We consider the version **Glucose** syrup 4.2.1 [4]. A very popular, successful and recent solver is **Lingeling** [7], which won several SAT competitions and the prize on the most innovative solver [5] in 2015. Two medalists of the SAT 2019 Race were **CaDiCaL** 1.0.3 [8] and a descendant of the solver **MapleSAT** [49], namely **MapleLCMDistChronoBTDL-v3** (**MapleSat19**) [45].

Testing the Solvers. In order to benchmark a solver, we first need to compile it or run the binary with a modern operating system as there is otherwise no chance to get the solvers running on modern hardware. First, we considered all solvers from the SATLIB collection. We were able to compile and successfully run the solvers **Grasp**, **Relsat**, **Satz**, and **SAT0**. However, we had to modify the source codes and build files so that they would compile with a modern compiler due to harder interpretations of language standards in modern compilers. Since the solvers were originally designed for 32bit Linux, we compiled the solvers on 32bit Linux and used them later on 64bit Linux by compatibility layers. While we were also successful in compiling solvers on 64bit systems, the 64bit binary would often solve fewer instances on the 64bit system or result in many segfaults. We suspect compatibility issues as either the developers of the old solvers could not expect certain datatypes on a future architecture or implemented sloppy memory management. All versions of the solver **siege**, which were available as a binary, still ran on a modern Linux using the 32bit compatibility mode. We were successful in building all versions of the solver **zChaff**;

⁶See: <https://www.cs.ubc.ca/~hoos/SATLIB/solvers.html>

⁷See: <https://github.com/roberto-bayardo/relsat>

⁸See: <http://minisat.se/MiniSat.html>

both on a 32bit as well as 64bit architecture. Unfortunately, the solver BerkMin does not run on modern or fairly recent Linux distribution. It turns out that the binary was compiled with an old gcc and linked to an old version of the glibc, which we discovered in an old Red Hat Enterprise Linux, but we were unable to integrate it into a modern Linux distribution. We found that all modern solvers were well maintained and still compiled on 32 and 64bit Linux distributions as well as a 64bit version of NetBSD.

Final Teams. In order to have a comparison on theoretical advances in SAT-solving between DPLL and CDCL from an abstract perspective and out of the hand of programmer, we picked the implementations by Donald Knuth [44]. The implementations represent particular time periods, more precisely, DPLL solver (**SAT10**), a DPLL look-ahead solver (**SAT11**), and a CDCL solver (**SAT13**), as well as a preprocessor (**SAT12**). We still tested the old solvers **RelSAT**, **Satz**, and **SATO**, which resulted in less than 20 solved instances on our modern hardware for the best solver among them (**SATO**). Since it is theoretically well-known that CDCL can be significantly faster than DPLL [61, 59], we already have the solvers by Knuth. There has already been work on the technological advances of various techniques between techniques in DPLL and CDCL solvers, we focus on the more modern CDCL solvers for both teams. However, since the solver **Grasp** decides a considerable number of instances and already implements conflict learning, we include **Grasp** into Team HW. Then, there are three solvers left for a team of solvers from about 20 years ago (Team HW), namely, **zChaff** (2001), **siege** (2003), and an early version of **MiniSat** (2005). We decided to include the earliest solver of **zChaff** (2001.2.17) into Team HW, since the numbers of solved instances did not differ much between the 2001 and 2004 versions on our reference hardware. We preferred to include version 3 of the solver **siege** (2003) as it solved about 12 instances more than version 1 (2001) on our modern reference hardware. We discarded **MiniSat** as the youngest of the older solvers. We picked **CaDiCaL** 1.0.3 [8] and **MapleLCMDistChronoBTDL-v3** (**MapleSat19**) [45] for Team SW (new solvers on old hardware) due to their good performance in the SAT 2019 Race. **MapleSat19** won the SAT 2019 Race, and **CaDiCaL** scored a second place. Since the slightly older solver **Glucose** syrup 4.2.1 [4] solved about ten instances more than the solver **Lingeling** 7d5db72 [7] on our modern reference hardware, we decided to pick **Glucose** for our Team SW.

2.3 Selecting the Environment: Operating System and Compiler

Since we are interested in comparing the team new solvers on old hardware and old solvers on new hardware, we think that it is only fair to also include advancements in kernel architecture, compilers, and operating systems into the consideration for new solvers. Anyway, it is not possible to obtain ancient Linux or Unix distributions due to missing source code mirrors and it is not possible to run such Linux or Unix distributions on modern hardware due to the lack of modern chipset drivers in ancient kernels. Due to long term support of hardware, we decided to favor Debian 10 codename buster (July 2019) [12] and try NetBSD 9 (Feb. 2020) [71] as operating systems. We ran the experiments on Linux kernel version 4.19.0-8-686-pae. We use gcc 8.3.0 on Debian and NetBSD. Our modern hardware at university was equipped with Linux Mint 19 codename Tara, kernel version 4.15.0-91, and gcc compiler version 7.5.0-3.

2.4 Selecting the Hardware

To have a wide variety of hardware, we started to gather old hardware from friends and colleagues. We collected ten systems over different generations, namely, systems containing a Pentium II (1998), a Pentium III (1999), an Ultra Sparc IIe (2001), a Pentium IV (2002), a Pentium IV Prescott (2004), a Core2 Duo (2007), an i5 Nehalem (2009), a Xeon Haswell (2013), a Xeon Skylake (2017), and an i7 Icelake (2019). A colleague prepared a SPARCstation II (1995) and SPARCstation Voyager (1995) for us.

Technical Restrictions. The selection of a benchmark set and operating systems restricted the space of possibilities on the potential old hardware. Preferably, we are interested in the oldest possible hardware and the youngest possible hardware. In more detail, modern Linux distributions such as Debian 10 still supports all x86-based (IA-32) i686 processors, including various AMD, Intel, and VIA processors. However, the i686 architectures limits experiments to Pentium II processors (1997) or later [36]. BSD distributions such as NetBSD 9 still supports the Sparc64 architecture, which in theory still allows the running of systems with processors SPARC64 (1995) and UltraSPARC IIe (1999). We were able run NetBSD 9 on a system with an Ultra Sparc IIe, namely, the Sun Netra X1 from about 2000/2001. Since for some solvers, we only had access to Linux or Solaris binaries and we were unable to setup Debian 10 or Solaris onto the Netra system in decent time due to a required setup via serial LOM interface and network boot, we discarded the Sun system from our final hardware selection. It is well known that modern operating systems and SAT-solvers are very memory-demanding [23] resulting in a requirement of having at least 1GB of total RAM inside the system. Since the L2 cache controllers of the Pentium II only allow the use of 512MB of RAM and we could not get access to a system with a Pentium Pro processor, our oldest possible system (1999) was a Pentium III processor running at 467MHz equipped with 1.5GB RAM. Hence, we picked this system to run the solvers of Team SW. While the most modern CPU architecture we had access to was an i7 Icelake (2019), we decided to prefer the system running a Xeon Skylake due to the much larger caches, which are usually beneficial for SAT-solving. Still, the modern system with the Xeon Skylake was bought in 2019 for dedicated benchmarking, while the i7 was just a small-form-factor barebone desktop computer for which we feared that high permanent load over months might significantly degenerate performance due to overheating. The system for Team HW then contained two Intel Xeon Silver 4112 CPUs (Skylake architecture) of 2.60GHz base-frequency equipped with 128GB RAM. We ran the experiments at the maximum frequency of 3.00GHz. Since the Netra X1 from 2000 was equipped with 2GB and the NetBSD allowed to still run all source code based solvers, even the very modern ones, the Sun system serves as a point of reference.

2.5 The Final Stage: Experimental Setting and Limitations

We compare wall clock time and number of timeouts. However, we avoid IO access on the CPU solvers whenever possible, i.e., we load instances into the RAM if a network file system is involved and store uncompressed instances. We set a timeout of 900 seconds, and limited available RAM to 512MB per instance and solver. We also tested for some solvers with resident set size restricted to 1GB RAM and observed only a very small difference. Since Intel hardware around 2002 rarely had more than 512MB RAM available, we went for the 512MB setup. We follow standard guidelines for benchmarking [73]. Note that we do not validate for correctness of the solver outputs. We set and enforce resource limits by the tool *runsolver* [62].

3 The Trophies

Table 3 gives an overview on the number of solved instances for each solver and the two hardware generations. Figure 1 illustrates the runtime of the selected solvers and hardware as a cactus plot. Our results and gathered source codes are all publicly available [21]. Note that we report only on the two Intel-based hardware generations in this table. The results on the Ultra Sparc IIe system look very similar, usually, a few more instances were solved. Detailed data can be found in the supplemental material.

3.1 Results

When we consider the number of solved instances on the hardware from 2019, **MapleSat19** solves 195 instances. Recall that Team HW consists of the old solvers on modern hardware. They

	Solver	Year/Generation	HW99	HW19
	MapleSat19	2019	Team SW 77	195
	CaDiCal	2019		190
	Glucose	2016		188
	vbest		124	198
	sum		281	573
	avg (%)		46.8	95.5
	siege_v3	2003	37	Team HW 93
	zChaff	2001	48	
	Grasp	1996	73	
	vbest		87	124
	sum		158	240
	avg (%)		26.3	40.0
Knuth	SAT13+12	CDCL+P	31	104
	SAT13	CDCL	31	98
	SAT11+12	LH+P	8	15
	SAT11	LH	15	20
	SAT10+12	DPLL+P	4	45
	SAT10	DPLL	6	4
Other Solvers	Lingeling	2019	70	179
	Lingeling-aqw-27d9fd4	2013	87	186
	Lingeling-276	2011	83	177
	MiniSat	2008	84	178
	siege_v4	2004	45	93
	siege_v1	2003	33	81
	sato	2000	15	19
	satz	1998	7	9

Table 3: Overview of the number of solved instances for the various solvers on our old and new hardware. HW99 represents the number of solved instances on the old hardware. HW19 represents the number of solved instances on the new hardware. **vbest** represents virtual best solvers, which are virtual solvers that we obtain by taking all instances that have been solved by the solvers considered in the group listed above.

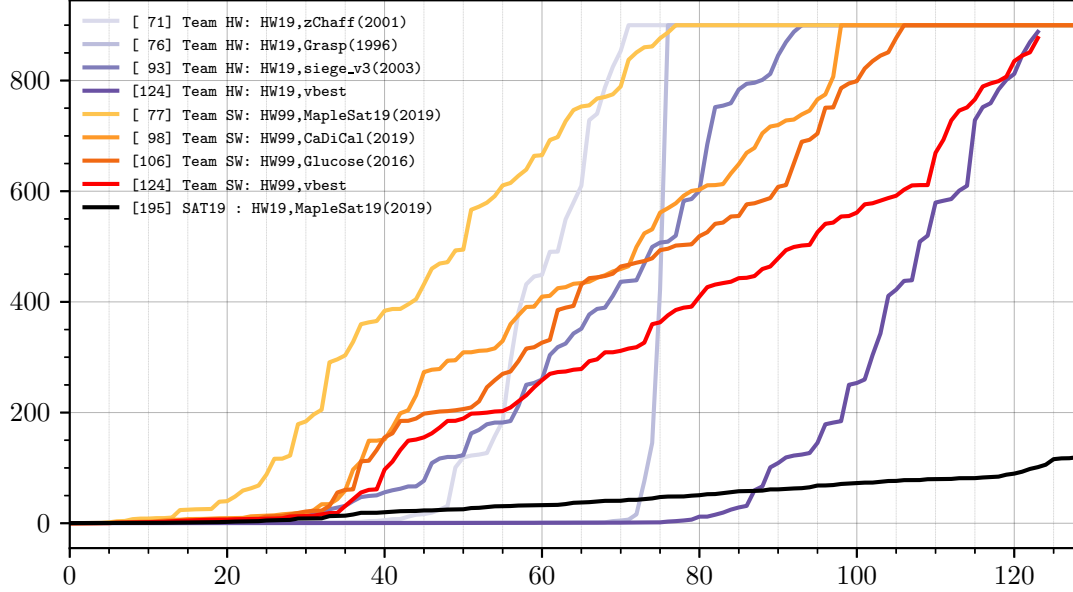


Figure 1: Runtime for the SAT-solvers on all considered instances. The x-axis refers to the number of instances, and the y-axis depicts the runtime sorted in ascending order for each solver individually. `vbest` refers to the virtual best solver, i.e., we take the union over the solved instances for each team and consider the minimum for each instance. In the legend `[X]` refers to a number of `X` solved instances. `HW19` refers to the new hardware, and `HW99` refers to the old hardware. `SAT19` refers to a modern solver on modern hardware, which one can consider as a potential baseline.

solve 93 instances (`siege_v3`), 76 instances (`Grasp`), and 71 instances (`zChaff`). On average, they solve about 80 instances (40% of the instances) at a standard deviation of about 12. However, the virtual best solver (`vbest`) for Team HW solves 124 instances, i.e., about 62% of the instances. The virtual best solver is the virtual solver that we obtain from taking the union over the solved instances by all three solvers and keeping the instance with best solved runtime. The Team SW consists of the new solvers on old hardware. They solve 77 instances (`MapleSat19`), 98 instances (`CaDiCal`), and 106 instances (`Glucose`). On average, they solved about 94 instances (46.8% of the instances) with a standard deviation of 15. Their virtual best solver (`vbest`) solves 124 instances, i.e., about 62% of the instances. When considering the results on the solvers `MapleSat19`, `CaDiCal`, and `Glucose` on modern hardware, they solve 191 instances on average with a very low standard deviation of 3.6 instances. When considering the results on the solvers `siege_v3`, `zChaff`, and `Grasp` on old hardware, they solve on average about 53 instances (26% of the instances) at a standard deviation of about 18.

3.2 Discussion of the Results

Comparing the Teams. The solver `MapleSat19`, which is the best solver from the 2019 SAT Race, solves as expected the highest number of instances on the new hardware. We are not surprised that neither Team SW nor Team HW or their virtual best solver gets anywhere close to this result. In view of Table 3 and Figure 1, there are plenty of ways to compare the two teams. One can carry out (i) an individual comparison by the best (`vbest`), worst, or average solver, or even consider the individual solvers in direct comparison to each other, but one could also (ii) consider the virtual best solver for each team. If we choose Method (i) and individually

compare the solvers, Team SW clearly wins for the measure best, worst, or average solver. We can also do one by one comparison and compare the solvers from each team individually with the solvers from the other team. Then, we take the number of solved instances for each solver X from Team SW against each solver Y from Team HW, and we give X a point if it solves more instances than Y or give a point to Y in the opposite case. Then, **Glucose** obtains 3 points (because it solves more instances than **siege.v3**, **zChaff**, and **Grasp**), **CaDiCal** obtains 3 points, and **MapleSat19** obtains 1 point, which totals 7 points for Team SW. In comparison, Team HW receives 0 points for **zChaff**, 0 points for **Grasp**, and 1 point for **siege.v3**, which totals 1 point. Hence, Team SW also wins. Nevertheless, if we consider the virtual best solvers, Team HW performs equally well as Team SW.

Notable Observations. We found it surprising that the winner from the 2019 SAT Race (**MapleSat19/HW99**) solves less instances than the best solver (**siege.v3/ HW19**) of Team HW. This seems surprising to us and we currently do not have a good explanation why **MapleSat19** solves so few instances on the old hardware, namely 21 instances less than **CaDiCal** and 29 instances less than **Glucose**. Since we observed a similar behavior with the latest implementation of Lingeling but not with **CaDiCal**, which also implements inprocessing techniques, we suspect that the advanced data structures in the solvers, the learning and restarting policy, and strong tuning towards modern hardware might be contributing factors. We found it interesting that the old solvers **siege.v3**, **zChaff**, and **Grasp** still solve a considerable number of instances on the new hardware. In particular, the solver **siege.v3** seems to benefit substantially from the new hardware, while **Grasp** gains almost no benefit from the new hardware. When we consider the implementations by Knuth, it is particularly remarkable that the DPLL solver with preprocessing on new hardware overtakes the CDCL solver with 45 solved instances. Where the CDCL implementation solves 31 instances with or without preprocessing on the old hardware.

3.3 Summary

When reviewing the results, we believe that our test-setting revealed that both Team SW and HW perform in a similar range. If we compare individually, Team SW wins, which is also well visible in the cactus plot in Figure 1. However, if we consider virtual best solvers, Team HW performs equally well. This leaves us with the conclusion that the last decades have brought enormous technological progress and innovation for SAT-solving, and the two main factors (i) *hardware advancement* and (ii) *algorithm advancement* both have a considerable influence.

4 Conclusion

We compare the impact of hardware and algorithm advancement on a genuine problem, namely, the propositional satisfiability problem (SAT). We describe in detail the decisions and challenges from a thought experiment to an actual experiment between old solvers and new solvers on new and old hardware with a time difference of about two decades. Our experiment’s outcome confirms that modern algorithms have a strong influence on the performance of solvers, even when they run on old hardware. Nonetheless, solving significantly profits from technological advancement in hardware development and there is no clear winner between Team SW (new solvers on old hardware) vs. Team HW (old solvers on new hardware) in our time leap challenge. Overall, both teams perform in a similar range with a slight advantage for Team SW (new solvers on old hardware), which leads us to the conclusion that both hardware and software advances in science and industry have a mutual influence on modern solving. Hence, algorithm advancements are at least as important for the field of SAT-solving as hardware advancement. Further, algorithm engineering becomes of more importance.

During our research, we noticed that long term reproducibility highly depends on available source code or static binaries with few dependencies. Further, it turned out helpful if the setup of a solver requires few additional system tools and few dependencies on external libraries. The dependencies within the operating system and source codes usually were not the problem as architectural dependencies would forbid to run the solvers. From our archaeological investigations, we suggest avoiding any external system for the setup for future long term experiments, i.e., tight dependencies on kernel versions or software containers such as Docker. Still, one uniform shared system for the entire community such as the SAT heritage project might prove helpful [1] if implemented also by competition organizers. Further, we think that public data libraries would be beneficial to understand long term advancements, not just source code repositories of private companies or university webpages.

One could post an open call and repeat the experiment with any solver. However, we believe that this would probably challenge developers of modern solvers to optimize their implementation for old hardware, which would result in a distorted picture for old solvers. Hence, we do not primarily intend to repeat the experiments in the near future [57].

We hope that our work stimulates research for others to also set up a time leap challenge in their fields such as for stochastic SAT-solvers, CSP-solvers, MaxSAT-solvers, and ILP-solvers.

Acknowledgements

We would like to thank several colleagues. Dave Mitchell and João Marques-Silva supported us with source codes from their old disks or mailboxes. Uwe Pretzsch and Siegmund Schoene helped to organize old hardware and Toni Pisjak maintained the modern benchmarking system, which we used.

References

- [1] Gilles Audemard, Loïc Paulevé, and Laurent Simon. SAT heritage: A community-driven effort for archiving, building and running more than thousand SAT solvers. In Luca Pulina and Martina Seidl, editors, *Proceedings of the 23rd International Conference on Theory and Applications of Satisfiability Testing (SAT'20)*, volume 12178 of *Lecture Notes in Computer Science*, pages 107–113, Alghero, Italy, July 2020. Springer Verlag.
- [2] Gilles Audemard and Laurent Simon. Predicting learnt clauses quality in modern SAT solvers. In Craig Boutilier, editor, *IJCAI 2009, Proceedings of the 21st International Joint Conference on Artificial Intelligence, Pasadena, California, USA, July 11-17, 2009*, pages 399–404, 2009.
- [3] Gilles Audemard and Laurent Simon. Glucose 2.1: Aggressive - but reactive - clause database management, dynamic restarts. In Daniel Le Berre and Allen Van Gelder, editors, *Proceedings of 3rd International Workshop of Pragmatics of SAT (PoS'12)*, Trento, Italie, 2012.
- [4] Gilles Audemard and Laurent Simon. Glucose in the SAT Race 2019. In Marijn J.H. Heule, Matti Järvisalo, and Martin Suda, editors, *Proceedings of SAT Race 2019 : Solver and Benchmark Descriptions*, volume B-2019-1 of *Department of Computer Science Report Series*, pages 19–20. University of Helsinki, 2019.
- [5] Tomáš Balyo, Armin Biere, Markus Iser, and Carsten Sinz. Sat race 2015. *Artificial Intelligence*, 241:45–65, 2016.
- [6] Roberto J. Bayardo and Robert C. Schrag. Using CSP look-back techniques to solve real-world sat instances. In Ben Kuipers and Bonnie Webber, editors, *Proceedings of the Fourteenth National Conference on Artificial Intelligence and Ninth Conference on Innovative*

- Applications of Artificial Intelligence (AAAI'97)*, pages 203–208, Providence, RI, USA, 1997. The AAAI Press.
- [7] Armin Biere. CaDiCaL, Lingeling, Plingeling, Treengeling, YalSAT Entering the SAT Competition 2017. In Tomáš Balyo, Marijn Heule, and Matti Järvisalo, editors, *Proc. of SAT Competition 2017 – Solver and Benchmark Descriptions*, volume B-2017-1 of *Department of Computer Science Series of Publications B*, pages 14–15. University of Helsinki, 2017.
 - [8] Armin Biere. CaDiCaL simplified satisfiability solver. <http://fmv.jku.at/cadical/>, 2019.
 - [9] Armin Biere, Marijn Heule, Hans van Maaren, and Toby Walsh, editors. *Handbook of Satisfiability*, volume 185 of *Frontiers in Artificial Intelligence and Applications*. IOS Press, Amsterdam, Netherlands, February 2009.
 - [10] Fritjof Bornebusch, Robert Wille, and Rolf Drechsler. Towards lightweight satisfiability solvers for self-verification. In *Proceedings of the 7th International Symposium on Embedded Computing and System Design (ISED'17)*, pages 1–5, Dec 2017.
 - [11] Hans Kleine Büning and Michael Buro. Report on a SAT competition. *Bulletin of the European Association for Theoretical Computer Science*, 49(1):143–151, 1993.
 - [12] Jonathan Carter. Debian 10 buster released. <https://www.debian.org/News/2019/20190706>, 2019.
 - [13] Geoffrey Chu, Aaron Harwood, and Peter Stuckey. Cache conscious data structures for Boolean satisfiability solvers. *J. on Satisfiability, Boolean Modeling and Computation*, 6:99–120, 02 2009.
 - [14] James M. Crawford and Larry D. Auton. Experimental results on the crossover point in satisfiability problems. In Richard Fikes and Wendy Lehnert, editors, *Proceedings of the 11th National Conference on Artificial Intelligence (AAAI'93)*, pages 21–27, Washington, D.C., USA, 1993. The AAAI Press.
 - [15] Martin Davis, George Logemann, and Donald Loveland. A machine program for theorem-proving. *Commun. ACM*, 5(7):394–397, July 1962.
 - [16] Martin Davis and Hilary Putnam. A computing procedure for quantification theory. *J. of the ACM*, 7(3):201–215, 1960.
 - [17] Niklas Eén and Armin Biere. Effective preprocessing in SAT through variable and clause elimination. In Fahiem Bacchus and Toby Walsh, editors, *Theory and Applications of Satisfiability Testing, 8th International Conference, SAT 2005, St. Andrews, UK, June 19-23, 2005, Proceedings*, volume 3569 of *Lecture Notes in Computer Science*, pages 61–75. Springer Verlag, 2005.
 - [18] Niklas Eén and Niklas Sörensson. An extensible SAT-solver. In Enrico Giunchiglia and Armando Tacchella, editors, *Proceedings of the 6th International Conference on Theory and Applications of Satisfiability Testing (SAT'03)*, pages 502–518. Springer Verlag, 2003.
 - [19] Niklas Eén and Niklas Sörensson. *MiniSAT*, 2008.
 - [20] Jan Elffers and Jakob Nordström. Divide and conquer: Towards faster pseudo-boolean solving. In Jérôme Lang, editor, *Proceedings of the Twenty-Seventh International Joint Conference on Artificial Intelligence, IJCAI-18*, pages 1291–1299. International Joint Conferences on Artificial Intelligence Organization, 7 2018.

- [21] Johannes K. Fichte, Markus Hecher, and Stefan Szeider. Analyzed Benchmarks and Raw Data on Experiments for Time Leap Challenge for SAT-Solving (Dataset). Zenodo, July 2020. <https://doi.org/10.5281/zenodo.3948480>
- [22] Johannes K. Fichte, Norbert Manthey, Julian Stecklina, and André Schidler. Towards faster reasoners by using transparent huge pages. *CoRR*, abs/2004.14378, 2020.
- [23] Johannes Klaus Fichte, Norbert Manthey, André Schidler, and Julian Stecklina. Towards faster reasoners by using transparent huge pages. In *CP*, Lecture Notes in Computer Science. Springer, 2020.
- [24] John Franco and John Martin. Chapter 1: A history of satisfiability. In Armin Biere, Marijn Heule, Hans van Maaren, and Toby Walsh, editors, *Handbook of Satisfiability*, volume 185 of *Frontiers in Artificial Intelligence and Applications*, pages 3–74. IOS Press, Amsterdam, Netherlands, February 2009.
- [25] Jon W. Freeman. *Improvements to Propositional Satisfiability Search Algorithms*. PhD thesis, Department of computer and Information science, University of Pennsylvania, Philadelphia, PA, USA, 1995.
- [26] Zhaohui Fu, Yogesh Mahajan, and Sharad Malik. zchaff. <https://www.princeton.edu/~chaff/zchaff.html>, 2004.
- [27] Stephan Gocht, Jakob Nordström, and Amir Yehudayoff. On division versus saturation in pseudo-boolean solving. In *Proceedings of the Twenty-Eighth International Joint Conference on Artificial Intelligence, IJCAI-19*, pages 1711–1718. International Joint Conferences on Artificial Intelligence Organization, 7 2019.
- [28] Eugene Goldberg and Yakov Novikov. Berkmin. <http://eigold.tripod.com/BerkMin.html>, 2003.
- [29] Carla P. Gomes, Henry Kautz, Ashish Sabharwal, and Bart Selman. Chapter 2: Satisfiability solvers. In Vladimir Lifschitz Frank van Harmelen and Bruce Porter, editors, *Handbook of Knowledge Representation*, volume 3 of *Foundations of Artificial Intelligence*, chapter 2, pages 89–134. Elsevier Science Publishers, North-Holland, Amsterdam, Netherlands, 2008.
- [30] Carla P. Gomes, Bart Selman, and Henry A. Kautz. Boosting combinatorial search through randomization. In Jack Mostow and Chuck Rich, editors, *Proceedings of the Fifteenth National Conference on Artificial Intelligence and Tenth Innovative Applications of Artificial Intelligence Conference, AAAI 98, IAAI 98, July 26-30, 1998, Madison, Wisconsin, USA*, pages 431–437. AAAI Press / The MIT Press, 1998.
- [31] John L. Hennessy and David A. Patterson. *Computer Architecture: A Quantitative Approach*. Morgan Kaufmann, 5th edition, 2011.
- [32] Holger Hoos. Satlib - benchmark problems. <https://www.cs.ubc.ca/~hoos/SATLIB/benchm.html>, 2000.
- [33] Holger Hoos. Satlib - solvers. <https://www.cs.ubc.ca/~hoos/SATLIB/solvers.html>, 2000.
- [34] Holger H. Hoos, Benjamin Kaufmann, Torsten Schaub, and Marius Schneider. Robust benchmark set selection for boolean constraint solvers. In *Proceedings of the 7th International Conference on Learning and Intelligent Optimization (LION’13)*, volume 7997 of *Lecture Notes in Computer Science*, pages 138–152, Catania, Italy, January 2013. Springer Verlag. Revised Selected Papers.

- [35] M. Iser, T. Balyo, and C. Sinz. Memory efficient parallel sat solving with inprocessing. In Robert Keefer, editor, *Proceedings of the IEEE 31st International Conference on Tools with Artificial Intelligence (ICTAI'19)*, pages 64–70. IEEE Computer Soc., 2019.
- [36] Ian Jackson, Christian Schwarz, and David A. Morris. Debian gnu/linux installation guide: 2.1. supported hardware. <https://www.debian.org/releases/stable/i386/ch02s01.en.html#idm272>, 2019.
- [37] Matti Järvisalo, Daniel Le Berre, Olivier Roussel, and Laurent Simon. The international SAT solver competitions. *AI Magazin*, 33(1), 2012.
- [38] Matti Järvisalo, Daniel Le Berre, Olivier Roussel, and Laurent Simon. The international SAT solver competitions. In *AI Magazin*. The AAAI Press, 2012.
- [39] Matti Järvisalo, Marijn Heule, and Armin Biere. Inprocessing rules. In Bernhard Gramlich, Dale Miller, and Uli Sattler, editors, *Automated Reasoning - 6th International Joint Conference, IJCAR 2012, Manchester, UK, June 26-29, 2012. Proceedings*, volume 7364 of *Lecture Notes in Computer Science*, pages 355–370. Springer Verlag, 2012.
- [40] David Johnson and Michael Trick. Satisfiability suggested format. <https://www.cs.ubc.ca/~hoos/SATLIB/Benchmarks/SAT/satformat.ps>, 1993.
- [41] Roberto J. Bayardo Jr. and J. D. Pehoushek. Counting models using connected components. In Henry A. Kautz and Bruce Porter, editors, *Proceedings of the 17th Conference on Artificial Intelligence (AAAI'00)*, Austin, TX, USA, 2000. The AAAI Press.
- [42] Brewster Kahle. Internet archive. <https://archive.org/>, 2020.
- [43] Hadi Katebi, Karem A. Sakallah, and João P. Marques-Silva. Empirical study of the anatomy of modern SAT solvers. In Karem A. Sakallah and Laurent Simon, editors, *Proceedings of the 14th International Conference on Theory and Applications of Satisfiability Testing (SAT'11)*, volume 6695 of *Lecture Notes in Computer Science*, pages 343–356, Ann Arbor, MI, USA, 2011. Springer Verlag.
- [44] Donald E. Knuth. *The Art of Computer Programming, Volume 4, Fascicle 6: Satisfiability*. Addison-Wesley, 2015.
- [45] Stepan Kochemazov, Oleg Zaikin, Victor Kondratiev, and Alexander Semenov. MapleLCMDistChronoBT-DL, duplicate learnts heuristic-aided solvers at the SAT Race 2019. In Marijn J.H. Heule, Matti Järvisalo, and Martin Suda, editors, *Proceedings of SAT Race 2019 : Solver and Benchmark Descriptions*, volume B-2019-1 of *Department of Computer Science Report Series*, pages 24–24. University of Helsinki, 2019.
- [46] Michael Kohlhase. The theorem prover museum - conserving the system heritage of automated reasoning. *CoRR*, abs/1904.10414, 2019.
- [47] Matthew D. T. Lewis, Tobias Schubert, and Bernd Becker. Speedup techniques utilized in modern SAT solvers. In Fahiem Bacchus and Toby Walsh, editors, *Theory and Applications of Satisfiability Testing, 8th International Conference, SAT 2005, St. Andrews, UK, June 19-23, 2005, Proceedings*, volume 3569 of *Lecture Notes in Computer Science*, pages 437–443. Springer Verlag, 2005.
- [48] Chu Min Li and Anbulagan Anbulagan. Heuristics based on unit propagation for satisfiability problems. In Michael P. Georgeff and Martha E. Pollack, editors, *Proceedings of the 15th International Joint Conference on Artificial Intelligence (IJCAI'97)*, pages 366–371, Nagoya, Japan, 1997. Morgan Kaufmann.

- [49] Jia Hui Liang, Vijay Ganesh, Pascal Poupart, and Krzysztof Czarnecki. Learning rate based branching heuristic for SAT solvers. In Nadia Creignou and Daniel Le Berre, editors, *Theory and Applications of Satisfiability Testing - SAT 2016 - 19th International Conference, Bordeaux, France, July 5-8, 2016, Proceedings*, volume 9710 of *Lecture Notes in Computer Science*, pages 123–140. Springer Verlag, 2016.
- [50] Michael Luby, Alistair Sinclair, and David Zuckerman. Optimal speedup of las vegas algorithms. *Information Processing Letters*, 47(4):173–180, 1993.
- [51] Nihar R. Mahapatra and Balakrishna Venkatrao. The processor-memory bottleneck: Problems and solutions. *XRDS*, 5(3es):2-es, April 1999.
- [52] João Marques-Silva. Grasp (SAT solver). Personal Communication, 2020.
- [53] Joao Marques-Silva, Ines Lynce, and Sharad Malik. Chapter 4: Conflict-driven clause learning sat solvers. In Armin Biere, Marijn Heule, Hans van Maaren, and Toby Walsh, editors, *Handbook of Satisfiability*, volume 185 of *Frontiers in Artificial Intelligence and Applications*, pages 127–148. IOS Press, Amsterdam, Netherlands, February 2009.
- [54] David G. Mitchell. A sat solver primer. In *The logic in computer science column*. Yuri Gurevich, 2005.
- [55] Gordon E. Moore. Cramming more components onto integrated circuits. *Electronics*, 38(8), 04 1965.
- [56] Matthew W. Moskewicz, Conor F. Madigan, Ying Zhao, Lintao Zhang, and Sharad Malik. Chaff: Engineering an efficient SAT solver. In Jan Rabaey, editor, *Proceedings of the 38th Annual Design Automation Conference (DAC’01)*, pages 530–535, Las Vegas, Nevada, USA, 2001. Assoc. Comput. Mach., New York.
- [57] Randall Munroe. xkcd2268. <https://xkcd.com/2268/>, 2019.
- [58] L. H. Nielsen. Software citations now available in zenodo. <https://blog.zenodo.org/2019/01/10/2019-01-10-asclepias/>, 2019.
- [59] Jakob Nordström. On the interplay between proof complexity and sat solving. *ACM SIGLOG News*, 2(3):19–44, August 2015.
- [60] Knot Pipatsrisawat and Adnan Darwiche. A lightweight component caching scheme for satisfiability solvers. In João Marques-Silva and Karem A. Sakallah, editors, *Theory and Applications of Satisfiability Testing - SAT 2007, 10th International Conference, Lisbon, Portugal, May 28-31, 2007, Proceedings*, volume 4501 of *Lecture Notes in Computer Science*, pages 294–299. Springer Verlag, 2007.
- [61] Knot Pipatsrisawat and Adnan Darwiche. On the power of clause-learning sat solvers with restarts. In Ian P. Gent, editor, *Proceedings of the 15th International Conference on Principles and Practice of Constraint Programming (CP’09)*, volume 5732 of *Lecture Notes in Computer Science*, pages 654–668, Lisbon, Portugal, 2009. Springer Verlag.
- [62] Olivier Roussel. Controlling a solver execution with the runsolver tool. *J. on Satisfiability, Boolean Modeling and Computation*, 7:139–144, 2011.
- [63] Lawrence Ryan. The siege SAT solver. <https://www2.cs.sfu.ca/research/groups/CL/software/siege/>, 2003.
- [64] Karem A. Sakallah and João Marques-Silva. Anatomy and empirical evaluation of modern SAT solvers. *Bulletin of the EATCS*, 103:96–121, 2011.

- [65] João P. Marques Silva and Karem A. Sakallah. GRASP - a new search algorithm for satisfiability. In *Proceedings on the 7th International Conference on Computer-Aided Design (ICCAD'96)*, pages 220–227, San Jose, CA, USA, November 1996. Assoc. Comput. Mach., New York.
- [66] Mate Soos. Enhanced gaussian elimination in DPLL-based SAT solvers. In Daniel Le Berre and Allen Van Gelder, editors, *Proceedings of the Pragmatics of SAT (POS'10)*, 2010.
- [67] Mate Soos. The CryptoMiniSat 5.5 set of solvers at the SAT Competition 2018. In Marijn J. H. Heule, Matti Järvisalo, and Martin Suda, editors, *Proceedings of SAT Competition 2018: Solver and Benchmark Descriptions*, volume B-2018-1, pages 17–18. Department of Computer Science Series, University of Helsinki, 2018.
- [68] Niklas Sörensson and Niklas Een. Minisat v1.13 – a SAT solver with conflict clause minimization. Technical report, Chalmers University of Technology, Sweden, 2005.
- [69] Richard Stallman. The GNU manifesto. <https://www.gnu.org/gnu/manifesto.en.html>, 1985.
- [70] Sebastian Stiller. *Planet der Algorithmen*. Albrecht Knaus Verlag, Munich, Germany, 2015.
- [71] the NetBSD www team. The NetBSD project. <https://www.netbsd.org/>, 2020.
- [72] Michael Trick, Vavsek Chvatal, Bill Cook, David Johnson, Cathy McGeoch, and Bob Tarjan. The 2nd dimacs implementation challenge: 1992–1993 on np hard problems: Maximum clique, graph coloring, and satisfiability. <http://archive.dimacs.rutgers.edu/pub/challenge/sat/benchmarks/>, 1993.
- [73] Erik van der Kouwe, Dennis Andriess, Herbert Bos, Cristiano Giuffrida, and Gernot Heiser. Benchmarking crimes: An emerging threat in systems security. *CoRR*, abs/1801.02381, 2018.
- [74] Ramin Zabih and David A. McAllester. A rearrangement search strategy for determining propositional satisfiability. In Howard E. Shrobe, Tom M. Mitchell, and Reid G. Smith, editors, *Proceedings of the 7th National Conference on Artificial Intelligence, St. Paul, MN, USA, August 21-26, 1988*, pages 155–160. AAAI Press / The MIT Press, 1988.
- [75] Hantao Zhang. Sato: An efficient propositional prover. In William McCune, editor, *Proceedings of the 14th International Conference on Automated Deduction (CADE'97)*, pages 272–275, Townsville, QLD, Australia, July 1997.