

# Solving Linear Algebra by Program Synthesis

Iddo Drori

MIT

EECS

idrori@mit.edu

Nakul Verma

Columbia University

Department of Computer Science

verma@cs.columbia.edu

## Abstract

We solve MIT’s Linear Algebra 18.06 course and Columbia University’s Computational Linear Algebra COMS3251 courses with perfect accuracy by interactive program synthesis. This surprisingly strong result is achieved by turning the course questions into programming tasks and then running the programs to produce the correct answers. We use OpenAI Codex with zero-shot learning, without providing any examples in the prompts, to synthesize code from questions. We quantify the difference between the original question text and the transformed question text that yields a correct answer. Since all COMS3251 questions are not available online the model is not overfitting. We go beyond just generating code for questions with numerical answers by interactively generating code that also results visually pleasing plots as output. Finally, we automatically generate new questions given a few sample questions which may be used as new course content. This work is a significant step forward in solving quantitative math problems and opens the door for solving many university level STEM courses by machine.

## 1 Introduction

Language models have vastly improved in recent years, with the advent of large-scale Transformer models such as GPT-3 (Brown et al., 2020) that perform well on question answering tasks. However, when it comes to answering quantitative problems such as word problems in mathematics or deduction from formal logic, these models show poor performance achieving accuracies close to random baselines (Hendrycks et al., 2020), failing on even the most simple questions such as computing the length of a vector.

Part of the challenge in finding a solution to quantitative problems is to have access to a working tree-like recursive memory. Quantitative problems often require building arithmetic expression trees

that help in mathematical deduction. These kinds of trees are also common in program representation and program synthesis. With this insight, we study the efficacy of solving math problems, specifically problems from introductory level undergraduate Linear Algebra courses, by turning each problem into the task of writing a function or program to solve that question. This is done using OpenAI’s Codex (Chen et al., 2021), a foundation model trained on both text and code.

We demonstrate the surprisingly simple yet strong result that foundation models for program synthesis such as OpenAI Codex succeed in synthesizing correct code for solving such quantitative math problems. Surprisingly, we find that Codex not only synthesizes correct code for problems that expect numerical answers, but also generates code for questions that ask to plot solutions. We achieve perfect accuracy in solving undergraduate level Linear Algebra course problems, and validate that our results are not merely overfitting the training data by solving a new course which is not available online, and is therefore unseen during Codex training.

As an example, consider a moderately involved question from MIT’s Linear Algebra course 18.06, Question 1 in Chapter 7.3 of Gilbert Strang’s textbook (2016), as shown in Figure 1. To the best of our knowledge none of the state-of-the-art quantitative reasoning models correctly answers such questions. As shown in Figure 1, given the question as text, we run the question through Codex as is without any modification to generate a program and execute the synthesized program to generate the correct solution.

## 2 Related Work

There have been several recent works that attempt to improve quantitative reasoning in math problems. MathBERT (Peng et al., 2021), for instance, is a Transformer based pre-trained language model that uses symbol and operator trees as intermediary

### Problem

Suppose  $A_0$  holds these 2 measurements of 5 samples:  $A_0 = [5, 4, 3, 2, 1; -1, 1, 0, 1, -1]$ . Find the average of each row and subtract it to produce the centered matrix  $A$ . Compute the sample covariance matrix  $S = AA' / (n-1)$  and find its eigenvalues. What line through the origin is closest to the 5 samples in the columns of  $A$ ?

→ davinci-codex →

```
import numpy as np
A0 = np.array([[5,4,3,2,1],[-1,1,0,1,-1]])
A = A0 - np.mean(A0, axis=1).reshape(2,1)
S = np.dot(A, A.T) / (5-1)
eigvals, eigvecs = np.linalg.eig(S)
print(eigvals)
print(eigvecs)
"""
What line through the origin is closest to the 5
samples in the columns of A?
"""
import numpy as np
A0 = np.array([[5,4,3,2,1],[-1,1,0,1,-1]])
A = A0 - np.mean(A0, axis=1).reshape(2,1)
S = np.dot(A, A.T) / (5-1)
eigvals, eigvecs = np.linalg.eig(S)
print(eigvecs[:,0])
```

→ Ans

Figure 1: Workflow for solving Linear Algebra questions: (i) Given a question in text, the example shown is Q1 in Ch. 7.3 of [Strang \(2016\)](#), (ii) we run the question through Codex to generate a program, (iii) we execute the program to generate the solution. We transform the question repeating steps (ii) and (iii) until we get it correct.

representations of formulas.

Another line of work has focused on solving math questions from a large database of questions collected from Chinese elementary school math classes. Techniques have included sequence-to-sequence and graph-to-tree Transformers which achieve around 80% on Math23k and MAWPS datasets ([Koncel-Kedziorski et al., 2016](#); [Li et al., 2019](#); [Wang et al., 2019](#); [Zhang et al., 2020](#); [Li et al., 2020](#); [Wu et al., 2020](#); [Qin et al., 2020](#); [Lan et al., 2021](#)). Other work ([Tsai et al., 2021](#)) includes knowledge graphs of geometry formulas into sequence-to-tree transformers to improve performance on the geometry section of Math23k dataset, and MWP-BERT, which adds masked fine-tuning to the BERT model using a large corpus of over 100,000 math word problems achieves an impressive 96.2% accuracy on the Math23k dataset ([Liang et al., 2021](#)) of elementary school math problems.

For solving university level machine learning problems specifically, a recent approach ([Tran et al., 2021](#)) uses graph neural networks and Transformers to predict an expression tree from the input question to calculate the answer. This achieves over 95% accuracy on numerical machine learning exercises, which is above human performance; however only works on the specific course it is trained on.

Rather than building a custom-designed solution, our work explores the use of a foundation model such as Codex which is trained on both text and code. Any program may be represented as an abstract syntax tree and many questions may also be represented as expression trees. Bringing the question and answer into a common representation makes it easier to find a correct solution. The advantage of studying this pre-trained model is that

it may be applied at scale to many different topics or subjects without additional training. Our work is the first to demonstrate perfect performance of interactively solving linear algebra problems at a university-level difficulty.

## 3 Methods

Here we describe our dataset, solution generation pipeline, and evaluation methodology. The key components leading to our success are:

- Program synthesis: Insight to use a program synthesis to generate a program, that has a built-in tree representation, that produces the solution to the given problem.
- Interactive workflow: we interactively work with Codex to produce both the correct result and visually pleasing plots as shown in Figure 2. We place the question in context by augmenting the question with definitions and information required for the solving the question, rephrase and simplify. See the Appendix for all the original and transformed questions.

### 3.1 Datasets

We use (i) problem exercises from Gilbert Strang’s *Introduction to Linear Algebra* textbook ([2016](#)), which is used for MIT’s Linear Algebra 18.06 course, and (ii) exercises given as homework problems in Columbia’s Computational Linear Algebra COMS3251 course, as two challenging real-world university-level datasets. Both courses have multivariable calculus as their prerequisites and are usually taken by second-year EE/CS undergraduate students. To keep things tractable, we select 3 to 4 random problems from each chapter of the textbook (for MIT 18.06) and from each topic (for COMS3251), resulting in two datasets of 30

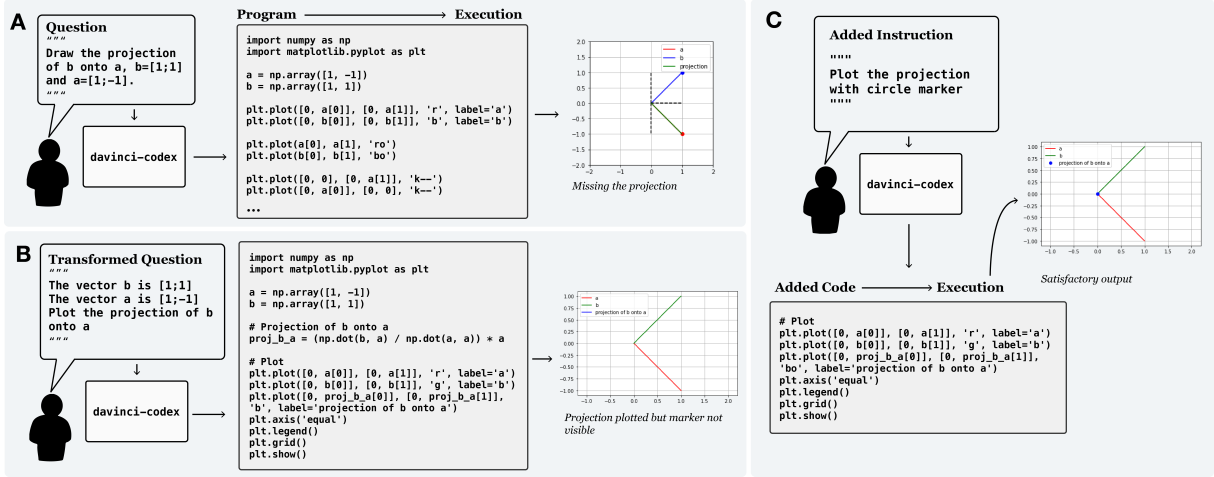


Figure 2: Interactive workflow: (A) We begin with the original question. Codex generates a program which is executed. The result is missing the projection. (B) We transform the question and Codex generates a program again to get the correct answer, though the zero projection vector does not appear on the plot, (C) An additional task to plot the projection vector with a marker so that it is visible results in Codex generating modified code which is executed to yield a correct answer and visually pleasing result.

questions each for our evaluation. These questions range in difficulty level, and output type (such as a numerical output or drawing a figure with multiple equations). See Figures 1, 2 for examples and the Appendix for a full list of questions.

### 3.2 Interactive Workflow

Our interactive workflow is illustrated in Figure 2. We begin with the original question from Strang’s book (Question 2b, Chapter 4.2), which we feed into Codex that generates a Python program that is then executed. In this example, the result is missing the projection solution. We therefore transform the question to explicitly ask for the projection and have Codex re-generate a program to get the correct answer. The answer also consists of a plot, however the zero projection vector is not visible in the plot since it is a point. We therefore add an additional task which is to plot the projection vector with a marker so that it becomes visible. Codex re-generates the code which is executed to yield both a correct answer and a visually pleasing plot. In all of our experiments we set Codex parameters to be the same fixed default values (using davinci-codex with temperature 0 and response length 200).

## 4 Results

### 4.1 Performance Evaluation

Our dataset includes 30 questions from MIT’s 18.06 and 30 questions from Columbia University’s COMS3251 and gets perfect accuracy on these

courses (see Appendix for detailed input and the solution output for each question in the datasets). In contrast, GPT3 yields 0% accuracy. We would like to quantify the extent of human effort required for achieving these perfect results. We therefore measure the similarity between the original question text and the final programming prompt that results in a correct answer. As shown in Figure 3 we observe highly similar texts. Specifically 90% median similarity for Columbia University’s COMS3251 and 80% median similarity for MIT’s 18.06, computed using the cosine similarity between their language embeddings. This demonstrates that only minor changes are required for turning a question into a program task that results in a correct answer. As a baseline we also include the similarity among the different original questions in each course, to

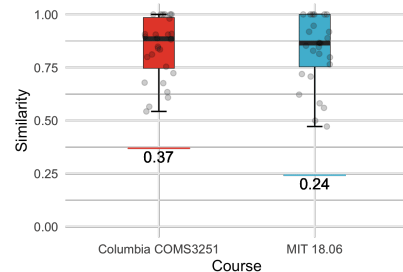


Figure 3: High similarity between the original questions and programming prompts for both COMS3251 and MIT 18.06. Baseline mean pairwise similarity among original questions for both courses shown as a solid horizontal line.

ID	Course	Auto-Generated question	Closest question in the dataset
1	MIT 18.06	Find the eigenvalues and eigenvectors of the matrix $A = [1, 1, 1; 1, 2, 3; 1, 3, 6]$ .	Find the eigenvalues of A and B (easy for triangular matrices) and $A + B$ : $A = [3, 0; 1, 1]$ , $B = [1, 1; 0, 3]$ , $A+B = [4, 1; 1, 4]$ . (Ch 6.1 Q5)
2	MIT 18.06	Find a matrix $A$ such that $A^2$ is not invertible but $A^3$ is invertible.	Find a matrix that has $A^2$ does not equal 0 but $A^3 = 0$ . (Ch 2.4 Q23b)
3	MIT 18.06	Find a basis for the nullspace of $A = [1, 1, 1; 1, 1, 1; 1, 1, 1]$ .	Construct a 2 by 2 matrix whose nullspace equals its column space. This is possible. (Ch 3.2 Q20)
4	MIT 18.06	Find a basis for the nullspace of $A$ if the columns of $A$ are unit vectors, all mutually perpendicular.	Find $A'A$ if the columns of $A$ are unit vectors, all mutually perpendicular. (Ch 4.1 Q25)
5	MIT 18.06	What 2 by 2 matrix $R$ rotates every vector through 90 degrees?	What 2 by 2 matrix $R$ rotates every vector through 45 degrees? Example: the vector $[1, 0]$ goes to $[\sqrt{2}/2, \sqrt{2}/2]$ . (Ch 2.1, Q21)
6	MIT 18.06	The complete solution to $Ax = [1; 3]$ is $x = [1; 0] + c[0; 1]$ . Find the nullspace of $A$ .	Construct a 2 by 2 matrix whose nullspace equals its column space. This is possible. (Ch 3.2 Q20)
7	MIT 18.06	Find a matrix $A$ that has a negative eigenvalue and is symmetric.	Find a symmetric matrix $[1, b; b, 1]$ that has a negative eigenvalue. (Ch 6.4, Q9a)
8	MIT 18.06	Find the best plane $C + Dt + Et^2$ to fit $b = [1, 2, 3, 4, 5]$ at times $t = 0, 1, 2, 3, 4$ .	Find the best line $C + Dt$ to fit $b = [4, 3, -1, 0, 0]$ at times $t = -2, -1, 0, 1, 2$ . (Ch 4.3, Q22)
9	COMS3251	Find the eigenvalues of the matrix $A = [1, 2; -2, -3]$ .	Find the eigenvalues of $[-0.2, 0.3; 0.2, -0.3]$ .
10	COMS3251	Compute the determinant of the following matrix: $[-1, -2; -2, -4]$	Compute the determinant of the following matrix: $[3, -4, 5; 0, -1, -5; 5, -4, 3]$
11	COMS3251	Find the determinant of the following matrix: $[1, -2, -1; 0, 2, -3; -4, -5, 6]$	Compute the determinant of the following matrix: $[3, -4, 5; 0, -1, -5; 5, -4, 3]$
12	COMS3251	Compute an LU decomposition of the matrix $A = [1, 2; -2, -3]$	Find an LU decomposition of the following matrix: $[-1, -1, 2; 2, 0, 3; -3, 2, -1]$
13	COMS3251	Which of the following matrices is a left inverse to $A = [1, 2, -3; -1, -1, 0; -2, -3, 3]$ ? (a) $[-1, 0, 2; -2, -3, 3; -6, -9, 9]$ (b) $[-1, -1, 0; 0.5, -0.5, 0; 1/6, -2/6, 3/6]$ (c) $[-1, -2, -3; 0.5, -0.5, 0; 1/6, -4/6, 9/6]$ (d) None of the above.	Compute the inverse of the following matrix: $[-1, -2; -2, 0]$
14	COMS3251	Find a combination of the vectors $[1; 2; 3]$ , $[4; 5; 6]$ , and $[7; 8; 9]$ that gives the vector $[12; 23]$	Find a combination of the vectors $[1; 2; 3]$ , $[4; 5; 6]$ , and $[7; 8; 9]$ that give the zero vector.
15	COMS3251	What is the dimension of the subspace spanned by the following vectors? $[1, 2, 3], [0, 1, 0], [-1/2, -1/3, 1]$	What is the dimension of the subspace spanned by the following vectors? $[2, -1/2], [1, 1], [4, 4]$
16	COMS3251	Find the projection matrix onto the column space of $A = [1, 2, 3; 4, 5, 6]$	Find the projection matrix onto the column space of $A [3, 6, 6; 4, 8, 8]$ .

Table 1: New questions generated from MIT Linear Algebra 18.06 questions and Computational Linear Algebra (COMS3251) questions, and the closest question among the existing questions.

verify the validity of our metric.

## 4.2 Generating New Questions

We are able to generate new questions with ease. We prompt Codex by a set of  $n$  numbered questions on different topics, and synthesize question number  $n + 1$ . Table 1 shows eight new generated questions for each course.

## 4.3 Limitations

We currently do not handle input drawings or any visual elements as input. Extending our approach to handle such inputs by using a multi-modal text and vision Transformer would help solve many diverse types of mathematical problems. While our methodology works well for numerical outputs and figures, our pipeline doesn't yet handle solutions

that require multi-line derivations or proofs. We currently often modify the original question manually to form a question for which Codex returns a program which solves the question correctly making our method interactive. We plan on training a Transformer, such as T5 (Raffel et al., 2020), for paraphrasing and performing this step automatically.

## 5 Conclusion

Our work is the first to solve linear algebra problems at a university-level difficulty. Our results open the door for solving other STEM courses, which has the potential to disrupt higher education by: (i) automatically learning all university level STEM courses, (ii) automatically grading course, and (iii) rapidly generating new course content.



## References

- Tom B Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. 2020. Language models are few-shot learners. *arXiv preprint arXiv:2005.14165*.
- Mark Chen et al. 2021. [Evaluating large language models trained on code](#).
- Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob Steinhardt. 2020. Measuring massive multitask language understanding. *arXiv preprint arXiv:2009.03300*.
- Rik Koncel-Kedziorski, Subhro Roy, Aida Amini, Nate Kushman, and Hannaneh Hajishirzi. 2016. MAWPS: A math word problem repository. In *Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 1152–1157.
- Yihuai Lan, Lei Wang, Qiyuan Zhang, Yunshi Lan, Bing Tian Dai, Yan Wang, Dongxiang Zhang, and Ee-Peng Lim. 2021. Mwptoolkit: An open-source framework for deep learning-based math word problem solvers. *arXiv preprint arXiv:2109.00799*.
- Jierui Li, Lei Wang, Jipeng Zhang, Yan Wang, Bing Tian Dai, and Dongxiang Zhang. 2019. Modeling intra-relation in math word problems with different functional multi-head attentions. In *Proceedings of Annual Meeting of the Association for Computational Linguistics*, pages 6162–6167.
- Shucheng Li, Lingfei Wu, Shiwei Feng, Fangli Xu, Fengyuan Xu, and Sheng Zhong. 2020. Graph-to-tree neural networks for learning structured input-output translation with applications to semantic parsing and math word problem. In *Conference on Empirical Methods in Natural Language Processing*, pages 2841–2852.
- Zhenwen Liang, Jipeng Zhang, Jie Shao, and Xiangliang Zhang. 2021. Mwp-bert: A strong baseline for math word problems. *arXiv preprint arXiv:2107.13435*.
- Shuai Peng, Ke Yuan, Liangcai Gao, and Zhi Tang. 2021. Mathbert: A pre-trained model for mathematical formula understanding. *arXiv preprint arXiv:2105.00377*.
- Jinghui Qin, Lihui Lin, Xiaodan Liang, Rumin Zhang, and Liang Lin. 2020. Semantically-aligned universal tree-structured solver for math word problems. *Conference on Empirical Methods in Natural Language Processing*.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. 2020. [Exploring the limits of transfer learning with a unified text-to-text transformer](#).
- G. Strang. 2016. *Introduction to Linear Algebra*. Wellesley-Cambridge Press.
- Sunny Tran, Pranav Krishna, Ishan Pakuwal, Prabhakar Kifle, Nikhil Singh, Jayson Lynch, and Iddo Drori. 2021. Solving machine learning problems. *Asian Conference on Machine Learning*.
- Shih-hung Tsai, Chao-Chun Liang, Hsin-Min Wang, and Keh-Yih Su. 2021. Sequence to general tree: Knowledge-guided geometry word problem solving. *arXiv preprint arXiv:2106.00990*.
- Lei Wang, Dongxiang Zhang, Jipeng Zhang, Xing Xu, Lianli Gao, Bing Tian Dai, and Heng Tao Shen. 2019. Template-based math word problem solvers with recursive neural networks. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 33, pages 7144–7151.
- Qinzhao Wu, Qi Zhang, Jinlan Fu, and Xuan-Jing Huang. 2020. A knowledge-aware sequence-to-tree network for math word problem solving. In *Conference on Empirical Methods in Natural Language Processing*, pages 7137–7146.
- Jipeng Zhang, Lei Wang, Roy Ka-Wei Lee, Yi Bin, Yan Wang, Jie Shao, and Ee-Peng Lim. 2020. Graph-to-tree learning for solving math word problems. In *Proceedings of the Annual Meeting of the Association for Computational Linguistics*, pages 3928–3937.

## A Computational Linear Algebra: Columbia University COMS3251

Topic	Matrix Algebra
Original question	Compute the following expression: $([-1, 0, 2; 0, 1, 4]' * [-2; 1]).([3, 1; 0, 0; -2, -1] * ([5, -3] + [-4, 2])')$ , where ' means transpose, * means matrix product, . means inner product.
Codex input	Compute the following expression: $(\text{transpose}([-1, 0, 2; 0, 1, 4]) * [-2; 1]).([3, 1; 0, 0; -2, -1] * \text{transpose}([5, -3] + [-4, 2]))$
Codex output	<pre>import numpy as np  a = np.array([[ -1, 0, 2], [0, 1, 4]]) b = np.array([[ -2], [1]]) c = np.array([[3, 1], [0, 0], [-2, -1]]) d = np.array([[5], [-3]]) e = np.array([[ -4], [2]])  print(np.dot(np.transpose(a), b)) print(np.dot(c, (d+e)))</pre>
Solution	4

COMS3251, Question 1: Original question, Codex input and output, and solution.

Topic	Vectors, Lengths and Dot products
Original question	Compute the squared $L_2$ norm of the vector $[1; -4; 2; 8; -1]$ .
Codex input	Original question
Codex output	<pre>import numpy as np  def compute_squared_L2_norm(vector):     return np.sum(np.square(vector))  vector = np.array([1, -4, 2, 8, -1]) print(compute_squared_L2_norm(vector))</pre>
Solution	86

COMS3251, Question 2: Original question, Codex input and output, and solution.

Topic	Solving Linear System of Equations
Original question	Find a solution to the following system of four equations: $4x - 2y + 8z + w = 3$ , $-8x + 10y + 3w = -2$ , $3x - 1y + 10z + 5w = -1$ , $2x + 2y + 9z - 2w = 8$ .
Codex input	Write a program to find a solution to the system of four equations: $4x - 2y + 8z + w = 3$ , $-8x + 10y + 3w + 2 = 0$ , $3x - 1y + 10z + 5w + 1 = 0$ , $2x + 2y + 9z - 2w = 8$
Codex output	<pre> from sympy import *  x, y, z, w = symbols('x y z w')  eq1 = 4*x - 2*y + 8*z + w - 3 eq2 = -8*x + 10*y + 3*w + 2 eq3 = 3*x - 1*y + 10*z + 5*w + 1 eq4 = 2*x + 2*y + 9*z - 2*w - 8  solve([eq1, eq2, eq3, eq4], [x, y, z, w]) </pre>
Solution	$x = 11/4, y = 97/44, z = -4/11, w = -15/22$

COMS3251, Question 3: Original question, Codex input and output, and solution.

Topic	Solving Linear System of Equations
Original question	A mining company has two mines. One day's operation at mine A produces ore that contains 10 metric tons of copper and 120 kilograms of silver, while one day's operation at mine B produces ore containing 6 metric tons of copper and 140 kilograms of silver. Let $a=[10;120]$ and $b=[6;140]$ . Then $a$ and $b$ represent the daily output of mines A and B, respectively. Suppose that the mining company operates mine A for $x$ days and mine B for $y$ days. Calculate how many number of days each mine should operate in order to produce 72 tons of copper and 1340 kilograms of silver.
Codex input	Let $a=[10;120]$ and $b=[6;140]$ . Write a program to compute positive $x$ and $y$ such that $x*a + y*b = [72;1340]$
Codex output	<pre> a = np.array([10, 120]) b = np.array([6, 140]) c = np.array([72, 1340])  # Solve for x and y in the equation x*a + y*b = c using # the numpy linear algebra function linalg.solve(a, b) x, y = np.linalg.solve(np.vstack((a, b)).T, c) print("x: ", x) print("y: ", y) </pre>
Solution	$x=3, y=7$

COMS3251, Question 4: Original question, Codex input and output, and solution.

Topic	Vectors, Lengths and Dot products
Original question	At noon, the minute and the hour hands of an analog clock coincide. What is the angle (in degrees) subtended by the minute and hour hands of an analog clock at 1:15?
Codex input	At noon, the minute and the hour hands of an analog clock coincide. Write a program to compute the angle (in degrees) subtended by the hands of an analog clock at 1:15
Codex output	<pre> def clock_angle(hour, minute):     hour_angle = (hour * 30) + (minute * 0.5)     minute_angle = (minute * 6)     angle = abs(hour_angle - minute_angle)     return angle  print(clock_angle(1, 15)) </pre>
Solution	52.5

COMS3251, Question 5: Original question, Codex input and output, and solution.

Topic	Matrix Algebra
Original question	For what matrix $R$ , the following matrix equation is satisfied? $R \begin{bmatrix} 1,0,0,0,0;1,1,0,0,0;1,2,1,0,0;1,3,3,1,0;1,4,6,4,1 \end{bmatrix} = \begin{bmatrix} 1,0,0,0,0;0,1,0,0,0;0,1,1,0,0;0,1,2,1,0;0,1,3,3,1 \end{bmatrix}$
Codex input	<code>A = np.matrix([[1,0,0,0,0],[1,1,0,0,0],[1,2,1,0,0],[1,3,3,1,0],[1,4,6,4,1]]) B = np.matrix([[1,0,0,0,0],[0,1,0,0,0],[0,1,1,0,0],[0,1,2,1,0],[0,1,3,3,1]]) "Solve X*A = B for X"</code>
Codex output	<pre># Solve X*A = B for X X = np.linalg.solve(A,B) print(X)</pre>
Solution	$\begin{bmatrix} 1,0,0,0,0;-1,1,0,0,0;-1,1,0,0,0;-1,1,0,0,0;-1,1,0,0,0 \end{bmatrix}$

COMS3251, Question 6: Original question, Codex input and output, and solution.

Topic	Rank, Basis and Dimension
Original question	Given a d-dimensional non-zero vector $v$ , compute the rank of the matrix $v \cdot v^T$
Codex input	Given a d-dimensional non-zero vector $v$ , write a program to compute the rank of the matrix $v \cdot \text{transpose}(v)$
Codex output	<pre>import numpy as np  def rank(v):     return np.linalg.matrix_rank(np.dot(v, v.T))</pre>
Solution	1

COMS3251, Question 7: Original question, Codex input and output, and solution.

Topic	Four Fundamental Subspaces of a Matrix
Original question	Compute the dimension of the null space of the following matrix. $\begin{bmatrix} 1,2,0,-1;-2,-3,4,5;2,4,0,-2 \end{bmatrix}$
Codex input	Write a program that finds the dimension of the null space of the matrix $\begin{bmatrix} 1,2,0,-1;-2,-3,4,5;2,4,0,-2 \end{bmatrix}$ . Use <code>scipy.linalg.null_space</code> . Get the <code>shape[1]</code> of the null space.
Codex output	<pre>import numpy as np from scipy import linalg  A = np.array([[1,2,0,-1],[-2,-3,4,5],[2,4,0,-2]])  print(linalg.null_space(A))  print(linalg.null_space(A).shape[1])</pre>
Solution	2

COMS3251, Question 8: Original question, Codex input and output, and solution.

Topic	Four Fundamental Subspaces of a Matrix
Original question	Compute the dimension of the left null space of the following matrix. $\begin{bmatrix} 1,2;2,4;3,6;4,8 \end{bmatrix}$
Codex input	Compute the dimension of the left null space of the matrix $\begin{bmatrix} 1,2;2,4;3,6;4,8 \end{bmatrix}$
Codex output	<pre>import numpy as np A = np.array([[1,2],[2,4],[3,6],[4,8]]) print(np.linalg.matrix_rank(A))</pre>
Solution	3

COMS3251, Question 9: Original question, Codex input and output, and solution.



Topic	Orthogonality and Projections
Original question	Compute the orthogonal projection of the vector $[-6;4]$ onto the line spanned by the vector $[3;2]$
Codex input	Compute the orthogonal projection of the vector $[-6;4]$ onto the line spanned by the vector $[3;2]$
Codex output	<pre>import numpy as np  # Define the two vectors v1 = np.array([3, 2]) v2 = np.array([-6, 4])  # Compute the orthogonal projection of v2 onto v1 and print it out proj = (np.dot(v1, v2) / np.dot(v1, v1)) * v1 print(proj)</pre>
Solution	$[-30/13;-20/13]$

COMS3251, Question 10: Original question, Codex input and output, and solution.

Topic	Least Squares Approximation
Original question	Find the least squares solution to the following matrix equation. $[0,1;1,1;2,1]*x=[6;0;0]$
Codex input	Write a program that finds the least squares solution to the matrix equation $[0,1;1,1;2,1]*x = [6;0;0]$
Codex output	<pre>import numpy as np A = np.array([[0,1],[1,1],[2,1]]) b = np.array([6,0,0]) x = np.linalg.solve(A,b) print(x)</pre>
Solution	$[-3;5]$

COMS3251, Question 11: Original question, Codex input and output, and solution.

Topic	Eigenvectors and Eigenvalues
Original question	Compute the eigenvalue associated with the eigenvector $[-684/721;228/721]$ of the matrix $[-6,3;4,5]$
Codex input	Write a program that finds the eigenvalue associated with the eigenvector $[-684/721;228/721]$ of the matrix $[-6,3;4,5]$
Codex output	<pre>import numpy as np A = np.array([[-6,3],[4,5]]) eigenvalues, eigenvectors = np.linalg.eig(A) print(eigenvalues) print(eigenvectors) print(eigenvalues[0]*eigenvectors[:,0]) print(eigenvalues[1]*eigenvectors[:,1])</pre>
Solution	$-7$

COMS3251, Question 12: Original question, Codex input and output, and solution.

Topic	Matrix Algebra
Original question	Compute the inverse of the following matrix: $[-1,-2;-2,0]$
Codex input	Compute the inverse of the following matrix: $[-1,-2;-2,0]$
Codex output	<pre>import numpy as np A = np.array([[-1,-2],[-2,0]]) print(np.linalg.inv(A))</pre>
Solution	$[0,-1/2;-1/2,1/4]$

COMS3251, Question 13: Original question, Codex input and output, and solution.

Topic	Determinants
Original question	Compute the determinant of the following matrix: [3,-4,5;0,-1,-5;5,-4,3]
Codex input	Compute the determinant of the following matrix: [3,-4,5;0,-1,-5;5,-4,3]
Codex output	<pre>import numpy as np matrix = np.array([[3,-4,5],[0,-1,-5],[5,-4,3]]) print(np.linalg.det(matrix))</pre>
Solution	56

COMS3251, Question 14: Original question, Codex input and output, and solution.

Topic	Special Matrices
Original question	Find the real numbers a, b and c so that the following matrix is symmetric. [0,a+b,c+2;a,2,c;4,a+b,4]
Codex input	Use sympy to find a, b, c so that [0,a+b,c+2;a,2,c;4,a+b,4] = transpose([0,a+b,c+2;a,2,c;4,a+b,4])
Codex output	<pre>import sympy  a, b, c = sympy.symbols('a b c') A = sympy.Matrix([[0, a + b, c + 2], [a, 2, c], [4, a + b, 4]]) B = A.transpose() print(sympy.solve([A[i] - B[i] for i in range(3)], (a, b, c)))</pre>
Solution	a=2,b=0,c=2

COMS3251, Question 15: Original question, Codex input and output, and solution.

Topic	Matrix Decomposition
Original question	Find an LU decomposition of the following matrix: [-1,-1,2;2,0,3;-3,2,-1]
Codex input	Find an LU decomposition of the following matrix: [-1,-1,2;2,0,3;-3,2,-1]
Codex output	<pre>import numpy as np A = np.array([[-1,-1,2],[2,0,3],[-3,2,-1]]) L = np.eye(3) U = A for i in range(3):     for j in range(i+1,3):         L[j,i] = U[j,i]/U[i,i]         U[j,:] = U[j,:] - L[j,i]*U[i,:] print(L) print(U)</pre>
Solution	[1,0,0;-2,1,0;3,-5/2,1]*[-1,-1,2;0,-2,7;0,0,21/2]

COMS3251, Question 16: Original question, Codex input and output, and solution.

Topic	Matrix Decomposition
Original question	Find an QR decomposition of the following matrix: [1,0,2;0,2,0;0,-1,1]
Codex input	Find an QR decomposition of the following matrix: [1,0,2;0,2,0;0,-1,1]
Codex output	<pre>import numpy as np A = np.array([[1,0,2],[0,2,0],[0,-1,1]]) Q,R = np.linalg.qr(A) print(Q) print(R)</pre>
Solution	[1,0,0;0,2/sqrt(5),1/sqrt(5);0,-1/sqrt(5),2/sqrt(5)]*[1,0,2;0,sqrt(5),-1/sqrt(5);0,0,2/sqrt(5)]

COMS3251, Question 17: Original question, Codex input and output, and solution.

Topic	Diagonalization and Eigenvectors/Eigenvalues
Original question	Diagonalize the following matrix: [2,-3,0;0,-1,0;1,3,1]
Codex input	Write a program that diagonalizes the matrix [2,-3,0;0,-1,0;1,3,1]
Codex output	<pre>import numpy as np A = np.array([[2,-3,0],[0,-1,0],[1,3,1]]) print(A) eig_val, eig_vec = np.linalg.eig(A) print(eig_val) print(eig_vec) D = np.diag(eig_val) print(D) V = eig_vec print(V) V_inv = np.linalg.inv(V) print(V_inv) print(np.dot(V, np.dot(D, V_inv)))</pre>
Solution	$[-1,0,1;-1,0,0;2,1,1]*[-1,0,0;0,1,0;0,0,2]*[0,-1,0;-1,3,1;1,-1,0]$

COMS3251, Question 18: Original question, Codex input and output, and solution.

Topic	Matrix Algebra
Original question	Compute the trace of the following matrix: [3,8,-2;1,0,2;-2,-1,5]
Codex input	Compute the trace of the following matrix: [3,8,-2;1,0,2;-2,-1,5]
Codex output	<pre>import numpy as np matrix = np.array([[3,8,-2],[1,0,2],[-2,-1,5]]) print(matrix.diagonal().sum())</pre>
Solution	8

COMS3251, Question 19: Original question, Codex input and output, and solution.

Topic	Four Fundamental Subspaces of a Matrix
Original question	Which of the vectors $v=[3;-3;1]$ , $u=[1;-2;1]$ is an element of the nullspace of the following matrix: [1,2,-3;-1,-1,0;-2,-3,3]
Codex input	Write a program that checks if a the vector is an element of the nullspace of a matrix Use the program to check if the vector [3;-3;1] is an element of the nullspace of the matrix [1,2,-3;-1,-1,0;-2,-3,3] Use the program to check if the vector [1;-2;1] is an element of the nullspace of the matrix [1,2,-3;-1,-1,0;-2,-3,3]
Codex output	<pre>import numpy as np  def is_nullspace(matrix, vector):     return np.allclose(np.dot(matrix, vector), 0)  if __name__ == '__main__':     matrix = np.array([[1, 2, -3], [-1, -1, 0], [-2, -3, 3]])     vector = np.array([[3], [-3], [1]])      print(is_nullspace(matrix, vector))      print(is_null([1, 2, -3], [-1, -1, 0], [-2, -3, 3],                   [1, -2, 1]))</pre>
Solution	$u=[1;-2;1]$

COMS3251, Question 20: Original question, Codex input and output, and solution.

Topic	Four Fundamental Subspaces of a Matrix
Original question	Find the nullity of the following matrix: [3,-2,-1,0,2;1,-2,1,-2,4;-4,4,0,2,-6]
Codex input	Write a program to find the rank of the matrix [3,-2,-1,0,2;1,-2,1,-2,4;-4,4,0,2,-6] Write a program to find the nullity, the number of columns minus the rank
Codex output	<pre>import numpy as np  matrix =     np.array([[3,-2,-1,0,2],[1,-2,1,-2,4],[-4,4,0,2,-6]])  print(np.linalg.matrix_rank(matrix))  print(len(matrix[0]) - np.linalg.matrix_rank(matrix))</pre>
Solution	3

COMS3251, Question 21: Original question, Codex input and output, and solution.

Topic	Solving Linear System of Equations
Original question	Compute the reduced row echelon form of the following matrix: [-1,2,1,0;2,1,0,-1;5,0,-2,6]
Codex input	Write a program to compute the reduced row echelon form (rref) of a matrix Compute the rref of the matrix [-1,2,1,0;2,1,0,-1;5,0,-2,6]
Codex output	<pre> def rref(matrix):     if not matrix: return     num_rows = len(matrix)     num_cols = len(matrix[0])      # Start at the last column and work backwards.     for col in range(num_cols - 1, -1, -1):          # Find the row with the leading non-zero entry in         # this column.         for row in range(num_rows):             if matrix[row][col] != 0: break          # If there is no leading non-zero entry, then all         # entries are zero.         if row == num_rows: continue          # Swap the current row with the one that has the         # leading non-zero entry.         matrix[row], matrix[num_rows - 1] = matrix[num_rows -             1], matrix[row]          # Eliminate all other entries in this column.         for r in range(num_rows):             if r == num_rows - 1: continue # skip pivot row;                 already done above              # Eliminate current row of all other entries in             # this column.             multiplier = matrix[r][col] / matrix[num_rows -                 1][col] # get multiplier to eliminate value at                 [r][c] from rest of row (except pivot)             for c in range(col, num_cols):                 matrix[r][c] -= multiplier * matrix[num_rows -                     1][c]          return matrix  if __name__ == "__main__":     print(rref([[1, 2, 3], [4, 5, 6], [7, 8, 9]]))  """ Compute the rref of the matrix [-1,2,1,0;2,1,0,-1;5,0,-2,6] """  if __name__ == "__main__":     print(rref([[-1, 2, 1, 0], [2, 1, 0, -1], [5, 0, -2,         6]])) </pre>
Solution	[1,0,0,-2;0,1,0,3;0,0,1,-8]

COMS3251, Question 22: Original question, Codex input and output, and solution.

Topic	Orthogonality and Projections
Original question	For what value of a makes the following matrix orthogonal: $[0,0,1;-1,0,0;0,a,0]$
Codex input	transpose(A)*A = I Using sympy, write a program that finds x such that the 3x3 matrix A=[0,0,1;-1,0,0;0,x,0] is orthogonal
Codex output	<pre> from sympy import *  x = Symbol('x') A = Matrix([[0,0,1],[-1,0,0],[0,x,0]]) print(A.transpose()*A) print(A.transpose()*A == eye(3)) print(solve(A.transpose()*A - eye(3), x)) """ Given a 3x3 matrix A=[1,2,3;4,5,6;7,8,9], find the eigenvalues and eigenvectors of A. """ from sympy import * init_printing() x = Symbol('x') A = Matrix([[1,2,3],[4,5,6],[7,8,9]]) eigenvals = A.eigenvals() # returns dictionary of eigenvalues and their multiplicity eigenvals # {-1: 1, 3: 1} # -1 is a real eigenvalue with multiplicity 1 and 3 </pre>
Solution	a=-1

COMS3251, Question 23: Original question, Codex input and output, and solution.

Topic	Basis, Dimension and Span
Original question	What is the dimension of the subspace spanned by the following vectors? $[2,-1/2],[1,1],[4,4]$
Codex input	In Linear Algebra, the vectors $[2,-1/2]$ , $[1,1]$ , and $[4,4]$ span a subspace. Write a program that finds the dimension of the subspace
Codex output	<pre> # Solution: # # The vectors [2,-1/2], [1,1], and [4,4] span a subspace. # # The vectors [2,-1/2], [1,1], and [4,4] are linearly independent. # # The dimension of the subspace is 2.  # Solution # # We can use the 'subspace_basis' function from the 'linear_algebra' package to find a basis for the subspace. using LinearAlgebra  # Define the vectors v1 = [2,-1/2] v2 = [1,1] v3 = [4,4]  # Find the basis for the subspace subspace_basis(v1,v2,v3) </pre>
Solution	2

COMS3251, Question 24: Original question, Codex input and output, and solution.



Topic	Basis, Dimension and Span
Original question	What are the coordinates of the vector [2;1] in the following basis? [2,-1/2],[1,1]
Codex input	What are the coordinates of the vector [2,1] in the basis [2,-1/2],[1,1] Use sympy to solve: $2x + y = 2$ $-0.5x + y = 1$
Codex output	<pre>from sympy import *  x = Symbol('x') y = Symbol('y') z = Symbol('z') print(solve([2*x + y - 2, -0.5*x + y - 1], [x, y]))</pre>
Solution	[0.4, 1.2]

COMS3251, Question 25: Original question, Codex input and output, and solution.

Topic	Orthogonality and Projection
Original question	Find the projection matrix onto the column space of A [3, 6, 6; 4, 8, 8].
Codex input	Write a program that finds the projection matrix onto the column space of A [3, 6, 6; 4, 8, 8].
Codex output	<pre>import numpy as np  A = np.array([[3, 6, 6], [4, 8, 8]])  print(np.linalg.svd(A)[2][0])</pre>
Solution	[9/25, 12/25; 12/25, 16/25]

COMS3251, Question 26: Original question, Codex input and output, and solution.

Topic	Linear Combination and Span
Original question	Find a combination of the vectors [1; 2; 3], [4; 5; 6], and [7; 8; 9] that give the zero vector.
Codex input	Write a program that finds the linear combination of the vectors [1; 2; 3], [4; 5; 6], [7; 8; 9] that give [0;0;0] Original question should state non-zero combination
Codex output	<pre>import numpy as np  a = np.array([1, 2, 3]) b = np.array([4, 5, 6]) c = np.array([7, 8, 9]) d = np.array([0, 0, 0])  def linear_combination(a, b):     return a[0] * b[0] + a[1] * b[1] + a[2] * b[2]  def find_vector(a, b):     return d - linear_combination(a, d) /         linear_combination(a, a) * a - linear_combination(b, d) / linear_combination(b, b) * b  print("The vector that gives [0;0;0] is: ",     find_vector(a, c))</pre>
Solution	[1, -2, 1], also [0,0,0]

COMS3251, Question 27: Original question, Codex input and output, and solution.

Topic	Diagonalization and Eigenvectors/eigenvalues
Original question	Find the eigenvalues of $\begin{bmatrix} -0.2 & 0.3 \\ 0.2 & -0.3 \end{bmatrix}$ .
Codex input	Write a program to find the eigenvalues of $\begin{bmatrix} -0.2 & 0.3 \\ 0.2 & -0.3 \end{bmatrix}$ .
Codex output	<pre>import numpy as np  A = np.array([[ -0.2,  0.3], [ 0.2, -0.3]])  print(np.linalg.eigvals(A))</pre>
Solution	$[0, 1/2]$

COMS3251, Question 28: Original question, Codex input and output, and solution.

Topic	Matrix Algebra
Original question	If $A = \begin{bmatrix} 1 & 2 \\ -2 & -3 \end{bmatrix}$ , compute $A^4$ .
Codex input	If $A = \begin{bmatrix} 1 & 2 \\ -2 & -3 \end{bmatrix}$ , write a program that computes $A^4$ .
Codex output	<pre>import numpy as np  A = np.array([[1, 2], [-2, -3]]) print(A) print(A**4)</pre>
Solution	$\begin{bmatrix} -7 & -8 \\ 8 & 9 \end{bmatrix}$

COMS3251, Question 29: Original question, Codex input and output, and solution.

Topic	Special Matrices
Original question	Give an example of two positive definite matrices $A$ and $B$ , whose difference is not positive definite
Codex input	Give an example of two positive definite matrices $A$ and $B$ , whose difference is not positive definite
Codex output	<pre>import numpy as np  def generate_matrices(n):     A = np.random.rand(n, n)     B = np.random.rand(n, n)     while np.linalg.det(A - B) &gt; 0:         B = np.random.rand(n, n)     return A, B  A, B = generate_matrices(3) print(A) print(B) print(A - B) print(np.linalg.det(A - B))</pre>
Solution	$A = B = I$

COMS3251, Question 30: Original question, Codex input and output, and solution.

## B Introduction to Linear Algebra: MIT 18.06

Topic	Vectors and Linear Combinations (1.1, Q3)
Original question	If $v+w = (5,1)$ and $v-w=(1,5)$ , compute and draw the vectors $v$ and $w$
Codex input	$v$ and $w$ are 1 by2 vectors such that $v + w = (5,1)$ and $v - w = (1,5)$ Write a program to find the vectors $v$ and $w$ Draw the vectors $v$ and $w$
Codex output	<pre> # Solution # # We can solve this problem by using the following steps: # # 1. We know that \$v + w = (5,1)\$ and \$v - w = (1,5)\$ # 2. We can subtract \$v - w\$ from both sides to get \$v + w - (v-w) = (5,1) + (1,5) - ((1,5)-(5,1))\$ # 3. This gives us \$2v = (6,6)\$ and hence \$v = (3,3)\$ # 4. Similarly we can find out that \$w = (-2,-2)\$  import matplotlib.pyplot as plt import numpy as np  plt.quiver(0, 0, v[0], v[1], angles='xy', scale_units='xy',            scale=1) plt.quiver(0, 0, w[0], w[1], angles='xy', scale_units='xy',            scale=1)  plt.xlim(-10, 10) plt.ylim(-10, 10) </pre>
Solution	This problem gives the diagonals $v + w$ and $v - w$ of the parallelogram and asks for the sides: The opposite of Problem 2. In this example $v = (3, 3)$ and $w = (2, -2)$ .

MIT 18.06, Question 1: Original question, Codex input and output, and solution.

Topic	Vectors and Linear Combinations (1.1, Q11)
Original question	Four of the eight corners of a unit cube are $(0,0,0)$ , $(1,0,0)$ , $(0,1,0)$ , $(0,0,1)$ . Find the coordinates of the center point of the cube.
Codex input	Four of the eight corners of a unit cube are $(0,0,0)$ , $(1,0,0)$ , $(0,1,0)$ , $(0,0,1)$ . Find the coordinates of the center point of the cube.
Codex output	<pre> def find_center(x,y,z):     return (x+0.5, y+0.5, z+0.5)  print(find_center(0,0,0)) </pre>
Solution	$(0.5, 0.5, 0.5)$

MIT 18.06, Question 2: Original question, Codex input and output, and solution.

Topic	Vectors and Linear Algebra (1.2 Q28)
Original question	If $v = (1,2)$ draw all vectors $w = (x,y)$ in the $xy$ plane with $\text{dot}(v,w) = x + 2y = 5$ . Why do those $w$ 's lie along a line? Which is the shortest $w$ ?
Codex input	If $v = (1,2)$ draw all vectors $w = (x,y)$ in the $xy$ plane with $\text{dot}(v,w) = x + 2y = 5$ . Why do those $w$ 's lie along a line? Which is the shortest $w$ ?
Codex output	<pre>import matplotlib.pyplot as plt import numpy as np  x = np.linspace(-10, 10, 100) y = 5 - x/2 plt.plot(x, y) plt.show()  plt.arrow(0, 0, 1, 2) # (x1, y1), (x2, y2) plt.show()</pre>
Solution	(1, 2)

MIT 18.06, Question 3: Original question, Codex input and output, and solution.

Topic	Vectors and Linear Algebra (1.3 Q1)
Original question	Find the linear combination $3s_1 + 4s_2 + 5s_3 = b$ . Then write $b$ as a matrix-vector multiplication $Sx$ , with 3, 4, 5 in $x$ . Compute the three dot products (row of $S$ ) $x$ : $s_1 = [1;1;1]$ , $s_2 = [0;1;1]$ , $s_3 = [0;0;1]$
Codex input	Write a function to calculate the linear combination $3*s_1 + 4*s_2 + 5*s_3$ . Let $s_1 = [1;1;1]$ , $s_2 = [0;1;1]$ , $s_3 = [0;0;1]$
Codex output	<pre>def linear_combination(s1, s2, s3):     return 3*s1 + 4*s2 + 5*s3  s1 = np.array([1,1,1]) s2 = np.array([0,1,1]) s3 = np.array([0,0,1])  print(linear_combination(s1, s2, s3))</pre>
Solution	$3s_1 + 4s_2 + 5s_3 = (3, 7, 12)$ . The same vector $b$ comes from $S$ times $x = (3, 4, 5)$ .

MIT 18.06, Question 4: Original question, Codex input and output, and solution.

Topic	Vectors and Linear Algebra (1.3, Q4)
Original question	Find a combination $x_1w_1 + x_2w_2 + x_3w_3$ that gives the zero vector with $x_1 = 1$ $w_1$ is the vector (1;2;3) $w_2$ is the vector (4;5;6) $w_3$ is the vector (7;8;9)
Codex input	Write a program to find a combination $y$ and $z$ such that multiplying $\text{np.array}([1, y, z]).T$ with $\text{np.array}([1, 2, 3], [4, 5, 6], [7, 8, 9]) = 0$ . Use sympy and numpy.
Codex output	<pre>import sympy as sp import numpy as np  y = sp.Symbol('y') z = sp.Symbol('z')  eq = np.array([1, y, z]).T @ np.array([1, 2, 3], [4, 5, 6], [7, 8, 9])  sp.solve(eq, [y, z])</pre>
Solution	The combination $0w_1 + 0w_2 + 0w_3$ always gives the zero vector, but this problem looks for other zero combinations (then the vectors are dependent, they lie in a plane): $w_2 = (w_1 + w_3)/2$ so one combination that gives zero is $w_1 - 2w_2 + w_3 = 0$ .

MIT 18.06, Question 5: Original question, Codex input and output, and solution.

Topic	Vectors and Linear Equations (2.1, Q21)
Original question	What 2 by 2 matrix R rotates every vector through 45 degrees? Example: the vector [1,0] goes to $[\sqrt{2}/2, \sqrt{2}/2]$ .
Codex input	What 2 by 2 matrix R rotates every vector through 45 degrees? Example: the vector [1,0] goes to $[\sqrt{2}/2, \sqrt{2}/2]$ .
Codex output	<pre>def rotate_45(vector):     return np.matmul(np.array([[np.sqrt(2)/2, np.sqrt(2)/2],                                 [-np.sqrt(2)/2, np.sqrt(2)/2]]), vector)  print(rotate_45([1,0]))</pre>
Solution	$R = (1/2)[\sqrt{2}, -\sqrt{2}; \sqrt{2}, \sqrt{2}]$

MIT 18.06, Question 6: Original question, Codex input and output, and solution.

Topic	Elimination Using Matrices (2.3, Q17)
Original question	The parabola $y = a + bx + cx^2$ goes through the points $(x,y) = (1,4)$ and $(2,8)$ and $(3,14)$ . Find and solve a matrix equation for the unknowns $(a,b,c)$
Codex input	The parabola $y = a + b*x + c*x^2$ goes through the points $(x1,y1) = (1,4)$ and $(x2,y2) = (2,8)$ and $(x3,y3) = (3,14)$ . $y1 = a + b*x1 + c*x1^2$ $y2 = a + b*x2 + c*x2^2$ $y3 = a + b*x3 + c*x3^2$ Solve for $(a, b, c)$
Codex output	<pre>import numpy as np  x1 = 1 x2 = 2 x3 = 3 y1 = 4 y2 = 8 y3 = 14  A = np.array([[1, x1, x1**2], [1, x2, x2**2], [1, x3, x3**2]]) b = np.array([y1, y2, y3])  print(np.linalg.solve(A, b))</pre>
Solution	$a = 2, b = 1, \text{ and } c = 1.$

MIT 18.06, Question 7: Original question, Codex input and output, and solution.

Topic	Rules for Matrix Operations (2.4, Q23b)
Original question	Find a matrix that has $A^2$ does not equal 0 but $A^3 = 0$
Codex input	Loop through random integer matrices with 0 until matrix A is found. A must satisfy conditions: $A**2$ not equals $\text{np.zeros}((2,2))$ and $A*3$ equals $\text{np.zeros}((2,2))$ .
Codex output	<pre> import numpy as np  def find_matrix_A(n):     """     Find matrix A with nxn dimensions.     """     while True:         A = np.random.randint(0,10, (n,n))         if np.array_equal(A**2, np.zeros((n,n))) == False and             np.array_equal(A*3, np.zeros((n,n))) == True:             return A  def main():     """     Main function.     """     n = int(input("Enter n: "))     A = find_matrix_A(n)     print(A)  if __name__ == "__main__":     main() </pre>
Solution	$A = \begin{bmatrix} 0 & 1 \\ 0 & 0 \end{bmatrix}$

MIT 18.06, Question 8: Original question, Codex input and output, and solution.

Topic	Rules for Matrix Operations (2.5, Q1)
Original question	Find the inverses (directly or from the 2 by 2 formula) of A, B, C : $A = \begin{bmatrix} 0 & 4 \\ 3 & 0 \end{bmatrix}$ , $B = \begin{bmatrix} 2 & 0 \\ 4 & 2 \end{bmatrix}$ , and $C = \begin{bmatrix} 3 & 4 \\ 5 & 7 \end{bmatrix}$ .
Codex input	Find the inverses of the matrices A, B, C : $A = \begin{bmatrix} 0 & 4 \\ 3 & 0 \end{bmatrix}$ , $B = \begin{bmatrix} 2 & 0 \\ 4 & 2 \end{bmatrix}$ , and $C = \begin{bmatrix} 3 & 4 \\ 5 & 7 \end{bmatrix}$ .
Codex output	<pre> import numpy as np  A = np.array([[0,4],[3,0]]) B = np.array([[2,0],[4,2]]) C = np.array([[3,4],[5,7]])  print(np.linalg.inv(A)) print(np.linalg.inv(B)) print(np.linalg.inv(C)) </pre>
Solution	$\text{inv}(A) = \begin{bmatrix} 0 & 1/4 \\ 1/3 & 0 \end{bmatrix}$ , $\text{inv}(B) = \begin{bmatrix} 1/2 & 0 \\ -1 & 1/2 \end{bmatrix}$ , and $\text{inv}(C) = \begin{bmatrix} 7 & -4 \\ -5 & 3 \end{bmatrix}$ .

MIT 18.06, Question 9: Original question, Codex input and output, and solution.



Topic	Rules for Matrix Operations (2.5, Q3)
Original question	Solve for the first column (x, y) and second column (t, z) of $A^{-1}$ : $[10, 20; 20, 50] @ [x; y] = [1; 0]$ and $[10, 20; 20, 50] @ [t; z] = [0; 1]$ .
Codex input	Solve for the first column (x, y) and second column (t, z) of $A^{-1}$ : $[10, 20; 20, 50] @ [x; y] = [1; 0]$ and $[10, 20; 20, 50] @ [t; z] = [0; 1]$ .
Codex output	<pre>import numpy as np  A = np.array([[10, 20], [20, 50]]) b = np.array([[1], [0]])  x = np.linalg.inv(A)@b  print(x)  A = np.array([[10, 20], [20, 50]]) b = np.array([[0], [1]])  x = np.linalg.inv(A)@b  print(x)</pre>
Solution	$[x; y] = [0.5; -0.2]$ and $[t; z] = [-0.2; 0.1]$ so $\text{inv}(A) = 1/10 * [5, -2; -2, 1]$

MIT 18.06, Question 10: Original question, Codex input and output, and solution.

Topic	Inverse Matrices (2.5, Q11b)
Original question	Find singular matrices A and B such that A+B is invertible.
Codex input	Find singular matrices A and B such that A+B is invertible.
Codex output	<pre>import numpy as np import numpy.linalg as la  def find_singular_matrices(n):     """     Find two matrices A and B such that A+B is invertible.     """     A = np.random.rand(n, n)     B = np.random.rand(n, n)     while la.det(A+B) == 0:         A = np.random.rand(n, n)         B = np.random.rand(n, n)     return A, B  def main():     """     Test the find_singular_matrices function.     """     A, B = find_singular_matrices(3)     print(A)     print(B)     print(A+B)  if __name__ == "__main__":     main()</pre>
Solution	$A = [1, 0; 0, 0]$ and $B = [0, 0; 0, 1]$

MIT 18.06, Question 11: Original question, Codex input and output, and solution.

Topic	Nullspaces (3.2, Q20)
Original question	Construct a 2 by 2 matrix whose nullspace equals its column space. This is possible.
Codex input	Write a function that checks the nullspace of a matrix. Write a function that checks the column space of a matrix. Write a function to iteratively search for a 2 by 2 matrix <code>np.array([[a, b], [c, d]])</code> and returns the values of the matrix whose nullspace equals its column space.
Codex output	<pre> def check_nullspace(matrix):     """     Checks the nullspace of a matrix.     """     return np.linalg.matrix_rank(matrix)  def check_columnspace(matrix):     """     Checks the column space of a matrix.     """     return np.linalg.matrix_rank(matrix.T)  def iterative_search(matrix):     """     Iteratively searches for a 2 by 2 matrix np.array([[a,     b], [c, d]]) and returns the values of the matrix     whose nullspace equals its column space.     """     for a in range(1, 10):         for b in range(1, 10):             for c in range(1, 10):                 for d in range(1, 10):                     if check_nullspace(np.array([[a, b], [c,                     d]])) == check_columnspace(np.array([[a,                     b], [c, d]])):                         return np.array([[a, b], [c, d]])  print(iterative_search(np.array([[1, 2], [3, 4]]))) </pre>
Solution	$A = \begin{bmatrix} 0 & 1 \\ 0 & 0 \end{bmatrix}$

MIT 18.06, Question 12: Original question, Codex input and output, and solution.

Topic	Independent, Basis and Dimension (3.4, Q1)
Original question	Show that $v_1, v_2, v_3$ are independent but $v_1, v_2, v_3, v_4$ are dependent. $v_1 = [1;0;0]$ , $v_2 = [1;1;0]$ , $v_3 = [1;1;1]$ , $v_4 = [2;3;4]$
Codex input	Let $v_1 = [1;0;0]$ , $v_2 = [1;1;0]$ , $v_3 = [1;1;1]$ , $v_4 = [2;3;4]$ . Write a function to show that $v_1, v_2$ , and $v_3$ are linearly independent. In linear algebra write a function that checks if vectors $v_1, v_2, v_3, v_4$ are independent. $v_1 = (1,0,0)$ , $v_2 = (1,1,0)$ , $v_3 = (1,1,1)$ , $v_4 = (2,3,4)$ Use arrays for the vectors $v_1, v_2, v_3, v_4$ are check if they are independent
Codex output	<pre>def lin_indep(v1, v2, v3):     return np.linalg.det(np.array([v1, v2, v3])) != 0  v1 = np.array([1, 0, 0]) v2 = np.array([1, 1, 0]) v3 = np.array([1, 1, 1]) v4 = np.array([2, 3, 4])  print(lin_indep(v1, v2, v3))  def is_independent(v1, v2, v3, v4):     return not any([v1.dot(v2), v1.dot(v3), v1.dot(v4),                     v2.dot(v3), v2.dot(v4), v3.dot(v4)])  v1 = np.array([1,0,0]) v2 = np.array([1,1,0]) v3 = np.array([1,1,1]) v4 = np.array([2,3,4])  is_independent(v1, v2, v3, v4)</pre>
Solution	$[1, 1, 1; 0, 1, 1; 0, 0, 1] \cdot [c_1; c_2; c_3] = 0$ gives $c_3 = c_2 = c_1 = 0$ . So those 3 column vectors are independent. But $[1 \ 1 \ 1 \ 2; 0 \ 1 \ 1 \ 3; 0 \ 0 \ 1 \ 4] \cdot c = [0; 0; 0]$ is solved by $c = (1, 1, -4, 1)$ then $v_1 + v_2 - 4v_3 + v_4 = 0$ (dependent)

MIT 18.06, Question 13: Original question, Codex input and output, and solution.

Topic	Orthogonality of the Four Subspaces (4.1, Q25)
Original question	Find $A^T A$ if the columns of $A$ are unit vectors, all mutually perpendicular.
Codex input	Find $A^T A$ if the columns of $A$ are unit vectors, all mutually perpendicular.
Codex output	<pre>import numpy as np  def transpose_multiply(A):     return np.dot(A.T, A)  def main():     A = np.array([[1, 0, 0], [0, 1, 0], [0, 0, 1]])     print(transpose_multiply(A))  if __name__ == "__main__":     main()</pre>
Solution	I

MIT 18.06, Question 14: Original question, Codex input and output, and solution.

Topic	Projections (4.2, Q2b)
Original question	Draw the projection of b onto a: $b=[1;1]$ and $a=[1;-1]$ .
Codex input	The vector b is $[1;1]$ The vector a is $[1;-1]$ Plot the projection of b onto a Plot the projection with circle marker
Codex output	<pre> """ The vector b is [1;1] The vector a is [1;-1] Plot the projection of b onto a """  import numpy as np import matplotlib.pyplot as plt  a = np.array([1, -1]) b = np.array([1, 1])  # Projection of b onto a proj_b_a = (np.dot(b, a) / np.dot(a, a)) * a  # Plot plt.plot([0, a[0]], [0, a[1]], 'r', label='a') plt.plot([0, b[0]], [0, b[1]], 'g', label='b') plt.plot([0, proj_b_a[0]], [0, proj_b_a[1]], 'b',          label='projection of b onto a') plt.axis('equal') plt.legend() plt.grid() plt.show()  """ Plot the projection with circle marker """  # Plot plt.plot([0, a[0]], [0, a[1]], 'r', label='a') plt.plot([0, b[0]], [0, b[1]], 'g', label='b') plt.plot([0, proj_b_a[0]], [0, proj_b_a[1]], 'bo',          label='projection of b onto a') plt.axis('equal') plt.legend() plt.grid() plt.show() </pre>
Solution	(0,0) with a corresponding plot.

MIT 18.06, Question 15: Original question, Codex input and output, and solution.

Topic	Projections (4.2, Q16)
Original question	What linear combination of (1,2,-1) and (1,0,1) is closest to b=(2,1,1)?
Codex input	Use scipy to optimize for x and y such that $\text{np.array}([1,2,-1]) \cdot x + \text{np.array}([1,0,1]) \cdot y$ is closest to $b = \text{np.array}([2,1,1])$ .
Codex output	<pre> import numpy as np from scipy.optimize import minimize  def objective(x):     return np.sum(np.square(np.array([1,2,-1])*x[0]+                                    np.array([1,0,1])*x[1]-np.array([2,1,1])))  x0 = np.array([0,0])  bnds = ((0,None),(0,None))  res = minimize(objective,x0,method='SLSQP',bounds=bnds)  print(res.x) </pre>
Solution	(2, 1, 1)

MIT 18.06, Question 16: Original question, Codex input and output, and solution.

Topic	Least Squares Approximations (4.3, Q22)
Original question	Find the best line $C + Dt$ to fit $b = 4, 3, -1, 0, 0$ at times $t = -2, -1, 0, 1, 2$ .
Codex input	Find the best fit line for $x = \text{np.array}([-2,-1,0,1,2])$ and $y = \text{np.array}([4,3,-1,0,0])$
Codex output	<pre> import numpy as np import matplotlib.pyplot as plt  x = np.array([-2,-1,0,1,2]) y = np.array([4,3,-1,0,0])  plt.plot(x,y,'ro') plt.show()  # y = mx + c # m = (mean(x)*mean(y) - mean(x*y)) / (mean(x)^2 - #    mean(x^2)) # c = mean(y) - m*mean(x)  m = (np.mean(x)*np.mean(y) - np.mean(x*y)) / (np.mean(x)**2     - np.mean(x**2)) c = np.mean(y) - m*np.mean(x)  print(m,c)  y_pred = m*x + c  plt.plot(x,y,'ro') plt.plot(x,y_pred) plt.show() </pre>
Solution	The best line is $b = 1 - t$ .

MIT 18.06, Question 17: Original question, Codex input and output, and solution.

Topic	Properties of Determinants (5.1, Q1)
Original question	If a 4 by 4 matrix has $\det(A)=1/2$ , find $\det(2A)$ , $\det(-1A)$ , $\det(A^2)$ and $\det(A^{-1})$ .
Codex input	The determinant of a 4 by 4 matrix A is 0.5. What is $\det(2A)$ , $\det(-1A)$ , $\det(A^2)$ , and $\det(A^{-1})$ ? Write a function to calculate the determinant of 2A is 16 times the determinant of A. Write a function to calculate the determinant of -1A is -1 raised to the fourth power times the determinant of A. Write a function to calculate the determinant of $A^2$ is half the determinant of A. Write a function to calculate the determinant of $A^{-1}$ is 1/the determinant of A.
Codex output	<pre>def det2A(A):     return 16*det(A)  def detMinus1A(A):     return -1**4*det(A)  def detA2(A):     return det(A)/2  def detAinv(A):     return 1/det(A)</pre>
Solution	$\det(2A)=2^4*\det(A)=8$ , $\det(-A)=(-1)^4\det(A)=0.5$ , $\det(A^2)=0.25$ , $\det(A^{-1})=2$

MIT 18.06, Question 18: Original question, Codex input and output, and solution.

Topic	Cramer's Rule, Inverses and Volumes (5.3, Q16a)
Original question	Find the area of the parallelogram with edges $v=(3,2)$ and $w=(1,4)$ .
Codex input	Find the area of the parallelogram with edges $v=(3,2)$ and $w=(1,4)$ .
Codex output	<pre># Solution  v = (3, 2) w = (1, 4) area = abs(v[0] * w[1] - v[1] * w[0]) print(area)</pre>
Solution	10

MIT 18.06, Question 19: Original question, Codex input and output, and solution.

Topic	Introduction to Eigenvalues (6.1, Q5)
Original question	Find the eigenvalues of A and B (easy for triangular matrices) and $A+B$ : $A = \begin{bmatrix} 3 & 0 \\ 1 & 1 \end{bmatrix}$ , $B = \begin{bmatrix} 1 & 1 \\ 0 & 3 \end{bmatrix}$ , $A+B = \begin{bmatrix} 4 & 1 \\ 1 & 4 \end{bmatrix}$ .
Codex input	Find the eigenvalues of A and B (easy for triangular matrices) and $A+B$ : $A = \begin{bmatrix} 3 & 0 \\ 1 & 1 \end{bmatrix}$ , $B = \begin{bmatrix} 1 & 1 \\ 0 & 3 \end{bmatrix}$ , $A+B = \begin{bmatrix} 4 & 1 \\ 1 & 4 \end{bmatrix}$ .
Codex output	<pre>import numpy as np  A = np.array([[3,0],[1,1]]) B = np.array([[1,1],[0,3]])  print(np.linalg.eigvals(A)) print(np.linalg.eigvals(B)) print(np.linalg.eigvals(A+B))</pre>
Solution	A and B have eigenvalues 1 and 3

MIT 18.06, Question 20: Original question, Codex input and output, and solution.



Topic	Introduction to Eigenvalues (6.1, Q10)
Original question	Find the eigenvalues and eigenvectors for both of these Markov matrices A and Ainf. A = [.6, .2; .4, .8]. Ainf = [1/3, 1/3; 2/3, 2/3].
Codex input	Find the eigenvalues and eigenvectors for both of these Markov matrices A and Ainf. A = np.array([[.6, .2], [.4, .8]]). Ainf = np.array([[1/3, 1/3], [2/3, 2/3]]).
Codex output	<pre> A = np.array([[.6, .2], [.4, .8]]) A_inf = np.array([[1/3, 1/3], [2/3, 2/3]])  eig_vals, eig_vecs = np.linalg.eig(A) eig_vals_inf, eig_vecs_inf = np.linalg.eig(A_inf)  print(eig_vals) print(eig_vecs) print(eig_vals_inf) print(eig_vecs_inf) </pre>
Solution	A – Eigenvalues: 1 and 0.4, with eigenvectors (1, 2) and x2 = (1, -1). Ainf – Eigenvalues: 1 and (0.4) <sup>100</sup> , same eigenvectors.

MIT 18.06, Question 21: Original question, Codex input and output, and solution.

Topic	Symmetric Matrices (6.4, Q9a)
Original question	Find a symmetric matrix [1,b;b,1] that has a negative eigenvalue.
Codex input	A = [1,b;b,1] is a symmetric matrix Find a value of b such that any one eigenvalue of A is negative.
Codex output	<pre> """ A = [[1,b],[b,1]] is a symmetric matrix Find a value of b such that any one eigenvalue of A is negative. """  import numpy as np import scipy.linalg as la  def find_b(n):     """     Find a value of b such that any one eigenvalue of A is     negative.     """     A = np.array([[1,b],[b,1]])     eigvals = la.eigvals(A)     if any(eigvals &lt; 0):         return b     else:         return find_b(n+1)  b = find_b(1) print(b) </pre>
Solution	b=2

MIT 18.06, Question 22: Original question, Codex input and output, and solution.

Topic	Positive Definite Matrices (6.5, Q3)
Original question	For which numbers b is the following matrices positive definite? $S=[1,b;b,9]$ , $S=[2,4;4,c]$ , $S=[c,b;b,c]$ .
Codex input	For which numbers b is the following matrices positive definite? $S=[1,b;b,9]$ , $S=[2,4;4,c]$ , $S=[c,b;b,c]$ . Write a program to search a value x and y for all three matrices to be positive definite: $\text{np.array}([[1,x],[x,9]])$ , $\text{np.array}([[2,4],[4,y]])$ , and $\text{np.array}([[y,x],[x,y]])$ .
Codex output	<pre>import numpy as np  def is_pos_def(x):     return np.all(np.linalg.eigvals(x) &gt; 0)  def main():     b = np.arange(1,10)     c = np.arange(1,10)     for i in b:         for j in c:             S1 = np.array([[1,i],[i,9]])             S2 = np.array([[2,4],[4,j]])             S3 = np.array([[j,i],[i,j]])             if is_pos_def(S1) and is_pos_def(S2) and is_pos_def(S3):                 print('S1 = {}, S2 = {}, S3 = {}'.format(S1,S2,S3))</pre>
Solution	(a) $-3 < b < 3$ , (b) $c > 8$ , (c) $c > b$

MIT 18.06, Question 23: Original question, Codex input and output, and solution.

Topic	Image processing by Linear Algebra (7.1, Q6)
Original question	Find the eigenvalues and the singular values of this 2 by 2 matrix $A=[2,1;4,2]$ . The eigenvectors (1,2) and (1,-2) of A are not orthogonal.
Codex input	Write a function to find the eigenvalues and the singular values of this 2 by 2 matrix $A=[2,1;4,2]$ . The eigenvectors (1,2) and (1,-2) of A are not orthogonal.
Codex output	<pre>import numpy as np  A = np.array([[2,1],[4,2]])  eigenvalues, eigenvectors = np.linalg.eig(A)  print(eigenvalues) print(eigenvectors)  singular_values = np.linalg.svd(A)  print(singular_values)</pre>
Solution	Eigenvalues are 4 and 0

MIT 18.06, Question 24: Original question, Codex input and output, and solution.

Topic	Principal Component Analysis (7.3,Q1)
Original question	Suppose A0 holds these 2 measurements of 5 samples: $A_0 = [5,4,3,2,1;-1,1,0,1,-1]$ . Find the average of each row and subtract it to produce the centered matrix A. Compute the sample covariance matrix $S=AA'/(n-1)$ and find its eigenvalues. What line through the origin is closest to the 5 samples in the columns of A?
Codex input	Suppose A0 holds these 2 measurements of 5 samples: $A_0 = [5,4,3,2,1;-1,1,0,1,-1]$ . Find the average of each row and subtract it to produce the centered matrix A. Compute the sample covariance matrix $S=AA'/(n-1)$ and find its eigenvalues. What line through the origin is closest to the 5 samples in the columns of A?
Codex output	<pre> """ Suppose A0 holds these 2 measurements of 5 samples: A0 = [5,4,3,2,1;-1,1,0,1,-1]. Find the average of each row and subtract it to produce the centered matrix A. Compute the sample covariance matrix S=AA^T/(n-1) and find its eigenvalues. """  import numpy as np  A0 = np.array([[5,4,3,2,1],[-1,1,0,1,-1]]) A = A0 - np.mean(A0, axis=1).reshape(2,1) S = np.dot(A, A.T) / (5-1) eigvals, eigvecs = np.linalg.eig(S)  print(eigvals) print(eigvecs)  """ What line through the origin is closest to the 5 samples in the columns of A? """  import numpy as np  A0 = np.array([[5,4,3,2,1],[-1,1,0,1,-1]]) A = A0 - np.mean(A0, axis=1).reshape(2,1) S = np.dot(A, A.T) / (5-1) eigvals, eigvecs = np.linalg.eig(S)  print(eigvecs[:,0]) </pre>
Solution	The vertical line passing through the origin is closest to the five datapoints.

MIT 18.06, Question 25: Original question, Codex input and output, and solution.

Topic	The Idea of a Linear Transformation (8.1, Q12)
Original question	Suppose a linear T transforms (1,1) to (2,2) and (2,0) to (0,0). Find T(v), when $v=[2,2]$ , $v=(3,1)$ , $v=(-1,1)$ , $v=(a,b)$ .
Codex input	Use a while True loop to find a random matrix M such that $M \cdot \text{np.array}([1,1], [2,2]) = \text{np.array}([2,2], [0,0])$ . Find $M \cdot \text{np.array}([2,2])$ . Find $M \cdot \text{np.array}([3,1])$ . Find $M \cdot \text{np.array}([-1,1])$ . Use Sympy to find $M \cdot \text{np.array}([a,b])$ .
Codex output	<pre>import numpy as np import sympy as sp  while True:     M = np.random.randint(1,10, (2,2))     if np.array_equal(M.dot(np.array([1,1], [2,2])),         np.array([2,2], [0,0])):         print(M)         print(M.dot(np.array([2,2])))         print(M.dot(np.array([3,1])))         print(M.dot(np.array([-1,1])))         a,b = sp.symbols('a b')         print(M.dot(np.array([a,b])))         break</pre>
Solution	$T(v) = (4, 4); (2, 2); (2, 2);$ if $v = (a, b) = b(1, 1) + a-b 2 (2, 0)$ then $T(v) = b(2, 2) + (0, 0)$

MIT 18.06, Question 26: Original question, Codex input and output, and solution.

Topic	Linear Algebra in Probability and Statistics (12.1, Q2)
Original question	We know: $1/3$ of all integers are divisible by 3 and $1/7$ of integers are divisible by 7. What fraction of integers will be divisible by 3 or 7 or both ?
Codex input	We know: $1/3$ of all integers are divisible by 3 and $1/7$ of integers are divisible by 7. Write a program to calculate the fraction of integers will be divisible by 3 or 7 or both ?
Codex output	<pre># Solution:  # import fractions module import fractions  # define a function to calculate the fraction of integers # divisible by 3 or 7 or both def divisible_by_3_or_7():     # calculate the fraction of integers divisible by 3 or 7     # or both     return fractions.Fraction(1, 3) + fractions.Fraction(1,         7) - fractions.Fraction(1, 21)  # print the result print(divisible_by_3_or_7())</pre>
Solution	If we add $1/3$ to $1/7$ (fraction of integers divisible by 3 plus fraction divisible by 7) we have double counted the integers divisible by both 3 and 7. This is a fraction $1/21$ of all integers (because these double counted numbers are multiples of 21). So the fraction divisible by 3 or 7 or both is $1/3 + 1/7 - 1/21 = 7/21 + 3/21 - 1/21 = 9/21 = 3/7$

MIT 18.06, Question 27: Original question, Codex input and output, and solution.

Topic	Linear Algebra in Probability and Statistics (12.1, Q4)
Original question	Sample again from 1 to 1000 but look at the last digit of the sample squared. That square could end with $x = 0, 1, 4, 5, 6$ , or 9. What are the probabilities $p_0, p_1, p_4, p_5, p_6, p_9$ ?
Codex input	Suppose you sample from the numbers 1 to 1000 with equal probabilities $1/1000$ and then square the number. What are the probabilities $p_0$ to $p_9$ that the last digit of your sample is 0, ..., 9?
Codex output	<pre>def prob_last_digit(n):     """     n: number of samples     """     # generate n samples     samples = np.random.randint(1, 1000, size=n)     # square the samples     samples = np.power(samples, 2)     # get the last digit of each sample     samples = samples % 10     # count the number of times each digit appears     counts = np.bincount(samples)     # normalize the counts     counts = counts / n     return counts  # print the probabilities print(prob_last_digit(1000000))</pre>
Solution	For numbers ending in 0, 1, 2, ..., 9 the squares end in $x = 0, 1, 4, 9, 6, 5, 6, 9, 4, 1$ . So the probabilities of $x = 0$ and 5 are $p = 1/10$ and the probabilities of $x = 1, 4, 6, 9$ are $p = 1/5$ The mean is $m = \sum p_i x_i = 0/0 + 5/10 + (1/5)*(1 + 4 + 6 + 9) = 4.5 = \text{same as before}$

MIT 18.06, Question 28: Original question, Codex input and output, and solution.

Topic	Linear Algebra in Probability and Statistics (12.1, Q8)
Original question	If all 24 samples from a population produce the same age $x = 20$ , what are the sample mean $\mu$ and the sample variance $S^2$ ?
Codex input	If all 24 samples from a population produce the same age $x = 20$ , what are the sample mean $\mu$ and the sample variance $S^2$ ?
Codex output	<pre># mu = 20 # S^2 = 0</pre>
Solution	$\mu = 20, S^2 = 0$

MIT 18.06, Question 29: Original question, Codex input and output, and solution.

Topic	Linear Algebra in Probability and Statistics (12.1, Q9)
Original question	Find the average $A_N$ of a million random 0-1 samples! What is $X = (A_N - 1/2)/(2*\sqrt{N})$ ?
Codex input	Find the average $A_N$ of a million random 0-1 samples! What is $X = (A_N - 1/2)/(2*\sqrt{N})$ ?
Codex output	<pre> import numpy as np import matplotlib.pyplot as plt  def get_average(N):     """     N: number of samples     """     samples = np.random.randint(0,2,N)     return np.mean(samples)  def get_X(N):     """     N: number of samples     """     return (get_average(N) - 0.5) / (2*np.sqrt(N))  def get_X_list(N):     """     N: number of samples     """     X_list = []     for i in range(N):         X_list.append(get_X(N))     return X_list  def get_X_mean(N):     """     N: number of samples     """     return np.mean(get_X_list(N))  def get_X_std(N):     """     N: number of samples     """     return np.std(get_X_list(N))  N = 1000000 print(get_X_mean(N)) print(get_X_std(N))  plt.hist(get_X_list(N), bins=100) plt.show() </pre>
Solution	$X = (A_N - 1/2)/(2\sqrt{N}) = (A_N - 1/2)/2000$ for $N = \text{one million}$ .

MIT 18.06, Question 30: Original question, Codex input and output, and solution.